

SUPPORT BRACKET KIT

D19450

LOW PIM CABLE SUPPORT BRACKET KIT. EACH KIT INCLUDES: SADDLE CLAMPS (QTY 2), 3/8" X 8" GALVANIZED THREADED ROD (QTY 2), 3/8 GALVANIZED NUTS (QTY 10) , 3/8" GALVANIZED LOCK WASHERS (QTY 6) , 3/8" GALVANIZED FLAT WASHERS (QTY 4)



Dimensions (*Saddle Clamps*)

Length	184.15 mm 7.25 in
Width	44.96 mm 1.77 in
Thickness	6.35 mm 0.25 in

General Specifications

Material Type	Steel
Finish	Hot Dip Galvanized
Mounting Type	Round Member
Mounting Range	2" - 3" OD
Torque	25 ft-lbs

Packaging

Package Quantity	1 Kit
------------------	-------

When installed properly, this product meets the requirements for installation in High Risk PIM Zones. Static and dynamic testing was conducted per IEC 46/666 "Passive RF and Microwave Devices, Intermodulation Level Measurement", "Part 8: Measurement of passive intermodulation generated by objects exposed to RF radiation" and IEC 62037-1.

Corporate Headquarters

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O. Box 1260 D-84526 Tittmoning Germany

Rosenberger Site Solutions, LLC

102 Dupont Dr.
Lake Charles, LA 70607

Phone: (337)598-5250

Fax: (337) 598-5290

Web: www.RosenbergerOnline.us

Version 112718

Page 1 of 1



SUPPORT BRACKET KIT D19450

LOW PIM CABLE SUPPORT BRACKET KIT. EACH KIT INCLUDES: SADDLE CLAMPS (QTY 2), 3/8" X 8" GALVANIZED THREADED ROD (QTY 2), 3/8 GALVANIZED NUTS (QTY 10) , 3/8" GALVANIZED LOCK WASHERS (QTY 6) , 3/8" GALVANIZED FLAT WASHERS (QTY 4)



Typical Application

- **STEP 1:**
Attach Threaded Rod to bracket (Torque 25 ft-lb)
- **STEP 2:**
Attach Clamp Set to Pole (Torque 25 ft-lb)
- **STEP 3:**
Attach Cable Clamps to Threaded Rods (Torque 10 ft-lb)

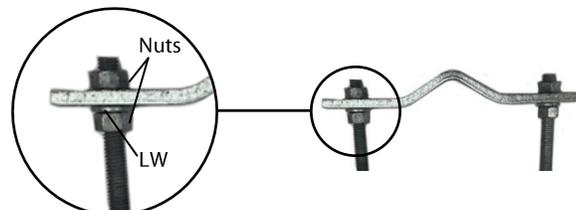

Low PIM Cable Support Bracket Kit shown with Double Clamps and Grommets (sold separately)

When installed properly, this product meets the requirements for installation in High Risk PIM Zones. Static and dynamic testing was conducted per IEC 46/666 "Passive RF and Microwave Devices, Intermodulation Level Measurement", "Part 8: Measurement of passive intermodulation generated by objects exposed to RF radiation" and IEC 62037-1.

NOTE

Installation of this product should only be performed by trained, qualified and experienced personnel. Installation instructions for this product should be read thoroughly before installation is performed. The manufacturer and supplier of this product disclaims any liability or responsibility for the results of improper or unsafe installation practice.