


RSS 6 AWG Low Inductance 6-12 Hybrid Feeder Cable w/ 9 Pair Alarm Wire HCH-6624XXX

RSS 6 AWG Low Inductance Coax Hybrid Feeder Cable. Coax Style 6 AWG 6 Conductors (6 PRs) + 24 SM-FIBER (12 PR) + 18 AWG 9PR Alarm, UL Tray Rated Cable.

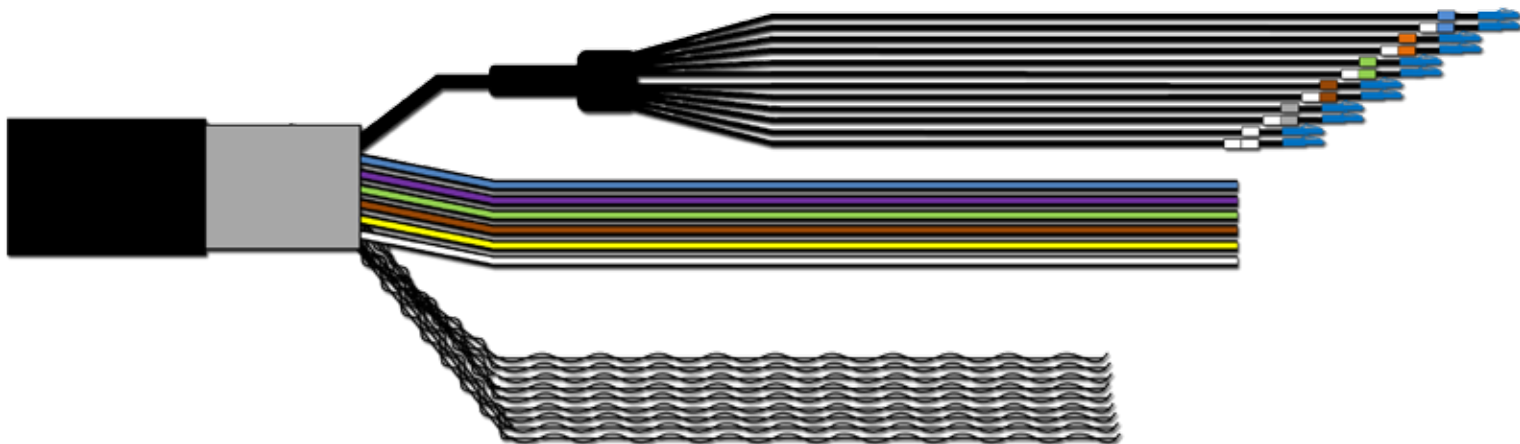

General Specifications

- Jacket OD: 1.474" ; Color: Black Polyvinylchloride
- Shielding: Corrugated Copper Tape
- Weight: 1.885 lbs/ft
- Bending Radius: 22.11"

Fiber Cable

- 12 pairs (24 fibers), Single Mode
- Connector Top & Bottom: 12 x LC Duplex

Fiber Pair Color Codes:

Fiber Pair	Color Code	
Pair 1	Blue	
Pair 7	Blue	White
Pair 2	Violet	
Pair 8	Violet	White
Pair 3	Green	
Pair 9	Green	White
Pair 4	Brown	
Pair 10	Brown	White
Pair 5	Yellow	
Pair 11	Yellow	White
Pair 6	White	
Pair 12	White	White

Power Cable

- Coax Style 6 AWG 6 Pairs
- Inner Conductor: (-)48
- Outer Conductor: Return

Conductor Color Codes:

Conductor Pair	Main Color	Identification Stripe Color
Pair 1	Black	Blue
Pair 2	Black	Violet
Pair 3	Black	Green
Pair 4	Black	Brown
Pair 5	Black	Yellow
Pair 6	Black	White

Alarm Wire

- 18 AWG 18 Conductors (9 Pairs - Twisted)

Alarm Wire Color Codes:

Conductor Pair	Main Color	Identification / Stripe Color
Pair 1	Black	Black / White
Pair 2	Black	Orange
Pair 3	Black	Violet
Pair 4	Black	Orange
Pair 5	Black	Red
Pair 6	Black	Grey
Pair 7	Black	Blue
Pair 8	Black	Brown
Pair 9	White	White / Black