




STANDARD ROUND U-BOLT SCHEDULE												
DIAMETER THREAD/INCH	NEW PART NUMBER	OLD PART NUMBER	S.R. OR PIPE (O.D.) RANGE	C/C BOLTS	INSIDE WIDTH	INSIDE LENGTH	THREAD LENGTH	TOTAL LENGTH	BLACK WEIGHT	GALV. ASSEMBLY WEIGHT	STRESS RELIEVED	
5/8-11 UNC-2A	C40034032	540353	4 1/2 ø	5 3/16	4 9/16	7 1/2	3	1'-6 9/16	1.62#	2.16#	N/R	
5/8-11 UNC-2A	C40034033	540354	4 3/4 ø	5 7/16	4 13/16	7 3/4	3	1'-7 1/4	1.67#	2.22#	N/R	
5/8-11 UNC-2A	C40034034	540355	5 ø	5 11/16	5 1/16	8	3	1'-7 7/8	1.70#	2.25#	N/R	
5/8-11 UNC-2A	C40034084	N/A	5 1/4 ø	5 15/16	5 5/16	8 1/4	3	1'-8 1/2"	2.22#	2.31#	N/R	
5/8-11 UNC-2A	C40034035	540356	5 9/16 ø	6 1/4	5 5/8	8 9/16	3	1'-9 5/16	1.90#	2.46#	N/R	
5/8-11 UNC-2A	C40034044		5 3/4 ø	6 7/16	5 13/16	8 3/4	3	1'-9 13/16	1.90#	2.46#	N/R	
5/8-11 UNC-2A	C40034064		6 ø	6 11/16	6 1/16	9	3	1'-10 7/16	1.95#	2.39#	N/R	
5/8-11 UNC-2A	C40034068		6 1/4 ø	6 15/16	6 5/16	9 1/4	3	1'-11 1/16	2.00#	2.54#	N/R	
5/8-11 UNC-2A	C40034036	540357	6 5/8 ø	7 5/16	6 11/16	9 5/8	3	2'-0 1/16	2.10#	2.67#	N/R	
5/8-11 UNC-2A	C40034077		6 5/8 ø	7 5/16	6 11/16	8 5/8	3	1'-10 1/16	1.92#	2.49#	N/R	
5/8-11 UNC-2A	C40034093		6 3/4 ø	7 7/16	6 13/16	9 3/4	3	2'-0 3/8	2.12#	2.60#	N/R	
5/8-11 UNC-2A	C40034065		7 1/4 ø	7 15/16	7 5/16	10 1/4	3	2'-1 5/8	2.23#	2.68#	N/R	
5/8-11 UNC-2A	C40034082	N/A	7 3/4 ø (SPECIAL)	8 1/2	7 7/8	8 5/8	3	1'-10 11/16"	2.43#	2.53#	N/R	
5/8-11 UNC-2A	C40034037	540358	8 5/8 ø	9 5/16	8 11/16	11 5/8	3	2'-5 3/16	2.54#	3.09#	N/R	
5/8-11 UNC-2A	C40034078		8 5/8 ø	9 5/16	8 11/16	9 5/8	3	2'-1 3/16	2.19#	2.76#	N/R	
5/8-11 UNC-2A	C40034083	N/A	9 3/4 ø (SPECIAL)	10 1/2	9 7/8	10 1/4	3	2'-3 1/16"	2.81#	2.92#	N/R	

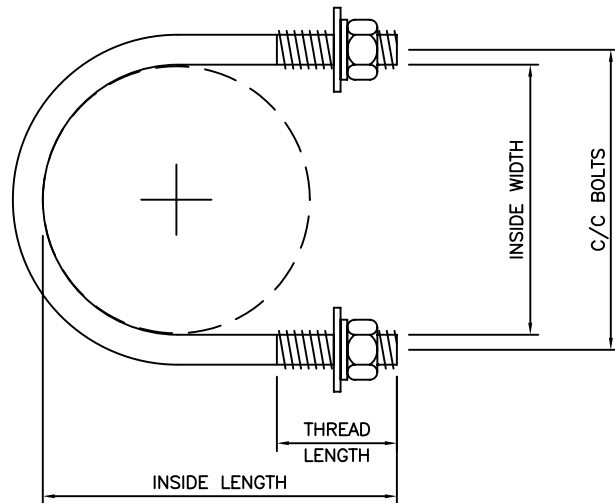

Distributed By
Rosenberger
Rosenberger Site Solutions, LLC
 Call 1.866.598.5250 or visit www.RLSS.us

NOTES:

1. SOLID ROUND MATERIAL TO BE ASTM A36 OR EQUAL.
2. ALL MATERIAL TO BE FORMED WHILE HOT.
3. FOR STRESS RELIEVED REQUIREMENTS SEE LAST COLUMN IN CHART ABOVE.
4. FINISH TO BE HOT DIP GALVANIZED PER ASTM A153.
5. ALL U-BOLTS ARE TO BE SUPPLIED WITH:
 - (2) HEX NUTS A563 GRADE A (FH)
 - (2) LOCKWASHERS ASME B18.21.1 (REGULAR)
 - (2) FLATWASHERS ASME B18.22.1 TYPE A (WIDE)

16	07/26/11	DRJ/CHH	ADDED C40034093.
15	01/06/11	KTW/PSB	ADDED C40034081.
14	8/10/10	KLE/ELK	ADDED C40034088, C40034089 & C40034090
13	3/4/09	KLE/ELK	ADDED C40034084
12	2/19/09	MLC/MC	ADDED C40034082 & C40034083
11	10/16/08	MLC/MC	ADDED C40034077 THRU C40034080
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS INCLUDE FINISHES AND ARE IN INCHES			
TOLERANCES: FRACTIONS ± 1/16" ANGLES ± 1/2 DEG. DECIMALS ± .010"			
			MATERIAL:
			TOLERANCES DO NOT APPLY TO RAW MATERIAL
10	4/23/07	KLE/CHH	ADDED C40034068
9	8/4/06	MLC/MC	ADDED STRESS RELIEVED REQUIREMENTS.
8	11/11/05	MLC/MC	ADDED MATERIAL GRADE FOR HARDWARE
7	5/17/04	KLE/DLW	REVISED GALV. NOTE (WAS ASTM A123)
6	1/23/04	KLE/DLW	ADDED C40034064 & C40034065
5	8/28/03	KLE/DLW	ADDED C40034044
4	5/7/02	KLE/DLW	ADDED C40034042, & C40034043
3	3/4/02	KLE/ELK	REMOVED EXTRA PART NUMBERS
2	12/20/00	KLE/BCT	CHGD. PART NUMBERS
1	7/21/00	KLE/BCT	CHGD. PART NUMBERS AND LENGTHS
REV	DATE	DRW/CHK	DESCRIPTION



CONFIDENTIAL

This document and the information contained herein is the confidential trade secret property of Sabre Communications Corporation ("Sabre") and must not be reproduced, copied or used, in whole or in part, for any purpose without the prior written consent of Sabre.
 © 2007 Sabre Communications Corporation.
 All rights reserved.

STANDARD 5/8ø U-BOLT SCHEDULE

		SIZE	DRAWING NO.		REV
DATE	6/12/00	B	C40034-3		16
DRAWN BY	BCT				
CHECKED BY	KLE				
			SCALE	PAGE	
			None	2 OF 3	