


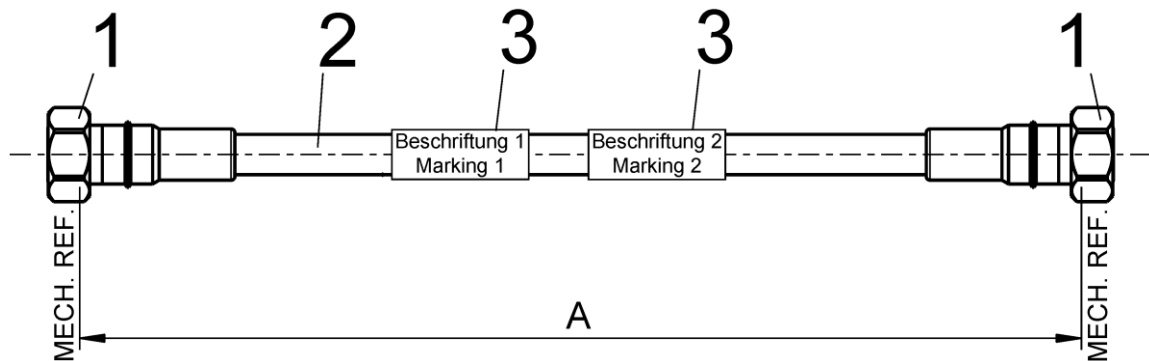

Function description

This part is a coaxial cable assembly for telecommunication equipment. It consists of 3/8" super flexible coaxial cable with PE jacket and two 4.3-10 male connectors. The assembly is waterproof in mated condition and UV protected.

Available variants

The assembly is available in lengths from 0.5 m to 10 m in intervals of 0.5 m. Different feet length are available on request.

Assembly parts

Connector	4.3-10 male (screw-type) connectors plated with white bronze
Cable	3/8" super flexible, PE jacket
Marking 1	Direct print onto the cable or one wrapping label Marking includes manufacturer, part nr. & batch no.
Marking 2	Direct print onto the cable or on wrapping label Marking includes "Rosenberger factory made" Position in the middle of the cable
Bend protection	molding material TPE compound

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG
RF_35/05.10/6.0

Technical Data Sheet				Rosenberger																																																							
3/8" JUMPER		4.3-10 MALE – 4.3-10 MALE		SLJ38SP-64M64M-X-00																																																							
Electrical data <table><tr><td>Impedance</td><td>50 Ω</td></tr><tr><td>Frequency</td><td>DC to 2.7 GHz</td></tr><tr><td>Return loss</td><td></td></tr><tr><td> DC – 1 GHz</td><td>≥ 32 dB</td></tr><tr><td> 1 – 2.2 GHz</td><td>≥ 30 dB</td></tr><tr><td> 2.2 – 2.7 GHz</td><td>≥ 28 dB</td></tr><tr><td>Insertion loss typ.</td><td></td></tr><tr><td> DC – 1 GHz</td><td>≤ 0.14 dB/m (cable) + 0.01 dB * √f (GHz)</td></tr><tr><td> 1 – 2.2 GHz</td><td>≤ 0.21 dB/m (cable) + 0.01 dB * √f (GHz)</td></tr><tr><td> 2.2 – 2.7 GHz</td><td>≤ 0.24 dB/m (cable) + 0.01 dB * √f (GHz)</td></tr><tr><td>Intermodulation (3rd order @ 2 x 20 W)</td><td>typ. max.</td></tr><tr><td></td><td>≤ -120 dBm ≤ -117 dBm</td></tr><tr><td>Relative Velocity of Propagation</td><td>82 %</td></tr><tr><td>DC Breakdown Voltage</td><td>2000V</td></tr></table> Mechanical data <table><tr><td>Coupling torque (recommended)</td><td>5 to 8 Nm</td></tr><tr><td>Spanner flat on coupling nut</td><td>22 mm</td></tr><tr><td>Cable diameter, jacket</td><td>10.2 mm typ.</td></tr><tr><td>Tensile strength</td><td>500 N</td></tr><tr><td>Recommended hanger spacing</td><td>0.6 m</td></tr><tr><td>Minimum bend radius single</td><td>13 mm*</td></tr><tr><td>Minimum bend radius repeated</td><td>25 mm*</td></tr><tr><td colspan="2">*Bending starts behind connector incl. kink protection</td></tr></table> Environmental data <table><tr><td>Operation temperature range</td><td>-30 °C to +80 °C</td></tr><tr><td>Installation temperature range</td><td>-25 °C to +60 °C</td></tr><tr><td>Degree of protection</td><td>IEC 60529, IP68 1 bar for 1 h (mated)</td></tr><tr><td>RoHS</td><td>compliant</td></tr></table>								Impedance	50 Ω	Frequency	DC to 2.7 GHz	Return loss		DC – 1 GHz	≥ 32 dB	1 – 2.2 GHz	≥ 30 dB	2.2 – 2.7 GHz	≥ 28 dB	Insertion loss typ.		DC – 1 GHz	≤ 0.14 dB/m (cable) + 0.01 dB * √f (GHz)	1 – 2.2 GHz	≤ 0.21 dB/m (cable) + 0.01 dB * √f (GHz)	2.2 – 2.7 GHz	≤ 0.24 dB/m (cable) + 0.01 dB * √f (GHz)	Intermodulation (3rd order @ 2 x 20 W)	typ. max.		≤ -120 dBm ≤ -117 dBm	Relative Velocity of Propagation	82 %	DC Breakdown Voltage	2000V	Coupling torque (recommended)	5 to 8 Nm	Spanner flat on coupling nut	22 mm	Cable diameter, jacket	10.2 mm typ.	Tensile strength	500 N	Recommended hanger spacing	0.6 m	Minimum bend radius single	13 mm*	Minimum bend radius repeated	25 mm*	*Bending starts behind connector incl. kink protection		Operation temperature range	-30 °C to +80 °C	Installation temperature range	-25 °C to +60 °C	Degree of protection	IEC 60529, IP68 1 bar for 1 h (mated)	RoHS	compliant
Impedance	50 Ω																																																										
Frequency	DC to 2.7 GHz																																																										
Return loss																																																											
DC – 1 GHz	≥ 32 dB																																																										
1 – 2.2 GHz	≥ 30 dB																																																										
2.2 – 2.7 GHz	≥ 28 dB																																																										
Insertion loss typ.																																																											
DC – 1 GHz	≤ 0.14 dB/m (cable) + 0.01 dB * √f (GHz)																																																										
1 – 2.2 GHz	≤ 0.21 dB/m (cable) + 0.01 dB * √f (GHz)																																																										
2.2 – 2.7 GHz	≤ 0.24 dB/m (cable) + 0.01 dB * √f (GHz)																																																										
Intermodulation (3rd order @ 2 x 20 W)	typ. max.																																																										
	≤ -120 dBm ≤ -117 dBm																																																										
Relative Velocity of Propagation	82 %																																																										
DC Breakdown Voltage	2000V																																																										
Coupling torque (recommended)	5 to 8 Nm																																																										
Spanner flat on coupling nut	22 mm																																																										
Cable diameter, jacket	10.2 mm typ.																																																										
Tensile strength	500 N																																																										
Recommended hanger spacing	0.6 m																																																										
Minimum bend radius single	13 mm*																																																										
Minimum bend radius repeated	25 mm*																																																										
*Bending starts behind connector incl. kink protection																																																											
Operation temperature range	-30 °C to +80 °C																																																										
Installation temperature range	-25 °C to +60 °C																																																										
Degree of protection	IEC 60529, IP68 1 bar for 1 h (mated)																																																										
RoHS	compliant																																																										
While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.																																																											
Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date																																																				
Chr. Janßen	28.03.2018	Weidenspöckner	28.03.2018	100	18-0005	Chr. Janßen	28.3.2018																																																				
Corporate Headquarters Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O. Box 1260 D-84526 Tittmoning Germany Tel. +49 8684 18-0				Rosenberger Site Solutions, LLC P.O. Box 4268, Lake Charles, LA 70606 Ph.337.598.5250 Fax: 337.598.5290 rlss@rlss.us www.RosenbergerOnline.us			Page 2 of 2																																																				