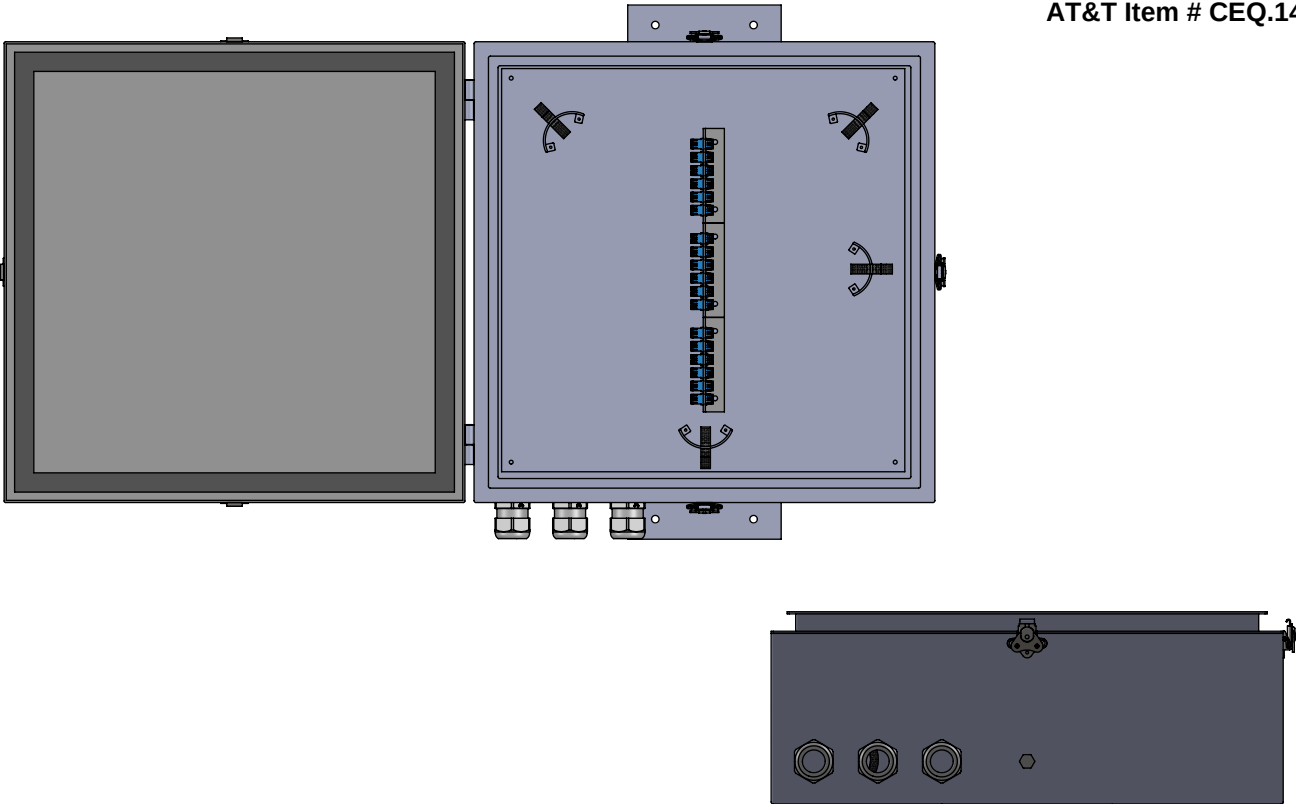
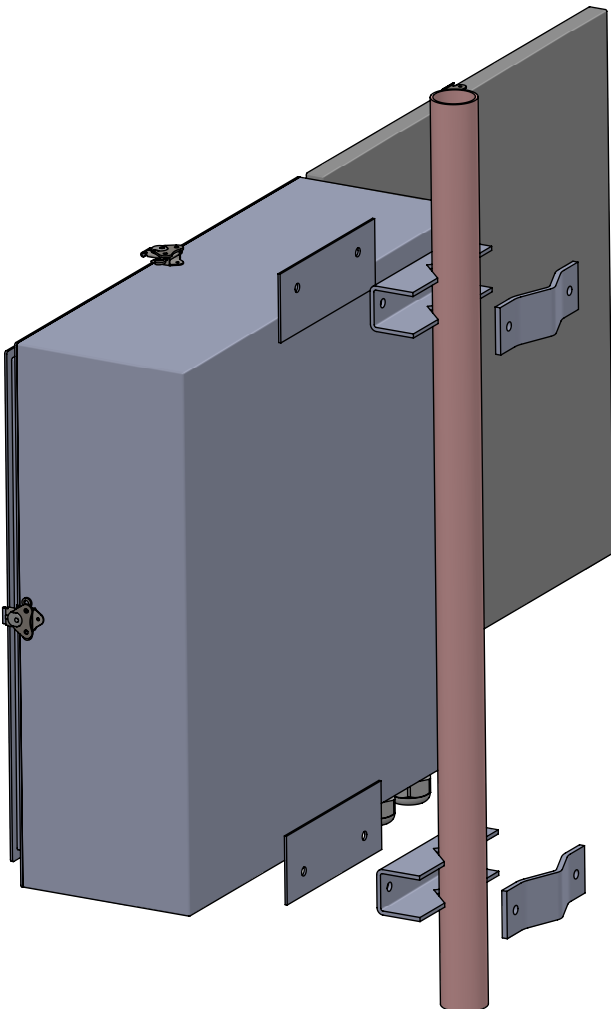


Technical Data Sheet		Rosenberger Site Solutions	
RSS Fiber Distribution Enclosure		F-2132-FIBER54	
		AT&T Item # CEQ.14285	
Description			
Rosenberger Fiber Distribution Enclosure for 54 Channel System (Accommodates Three 18 Pair Fiber Trunk)			
The Rosenberg Site Solutions Fiber Distribution Enclosure is used for fiber management at top or bottom of towers. The enclosure provides connectivity of the Fiber Trunk Cable to the associated Fiber Jumpers. These jumpers then attach to the Remote Radio Units (RRU) or equipment. The sturdy enclosure provides water and dust proof protection to fiber connections. Included mounting hardware eases attachment of the enclosure to many typical installation options.			
Features and Specifications			
Capacity:	54 Fibers		
Cable Entry:	3x M40x1.5 mm strain relief glands to support 3x 18-pair Rosenberg Fiber Trunk.		
Cable Output:	Space for up to 3x 3" conduit openings		
Corporate Headquarters Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O. Box 1260 D-84526 Tittmoning Germany		Rosenberger Site Solutions, LLC 102 Dupont Dr. Lake Charles, LA 70607 Phone: (337) 598-5250 Fax: (337) 598-5290 Web: www.rosenbergeronline.us	
		Page: 1/3	

Technical Data Sheet	Rosenberger Site Solutions
RSS Fiber Distribution Enclosure	F-2132-FIBER54
AT&T Item # CEQ.14285	
Fiber Panel	
Capacity:	LC Adaptor Panel with 54 LC Duplex Adaptors
Cable Management:	Cable management provided for fiber fanouts and jumper assemblies
Internal Configuration (Conceptual Drawing)	
Corporate Headquarters Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O. Box 1260 D-84526 Tittmoning Germany	Rosenberger Site Solutions, LLC 102 Dupont Dr. Lake Charles, LA 70607
Phone: (337) 598-5250 Fax: (337) 598-5290 Web: www.rosenbergeronline.us	
Page: 2/3	

Technical Data Sheet		Rosenberger Site Solutions	
RSS Fiber Distribution Enclosure		F-2132-FIBER54	
		AT&T Item # CEQ.14285	
Mechanical Specifications			
Dimensions:		24" x 24" x 8" [609.6 mm x 609.6 mm x 203.2 mm]	
Material:		Aluminum	
Latches:		Stainless steel latches with padlock hasps	
Mounting			
Mounting:		a. Wall mounting via top and bottom flanges b. Pipe mounting hardware (Brackets & Nuts/Bolts) included to support 1-1/4" to 4" nominal pipe size (1-1/2" to 4-1/2" O.D.).	
Corporate Headquarters		Rosenberger Site Solutions, LLC	
Rosenberger Hochfrequenztechnik GmbH & Co. KG		102 Dupont Dr. Lake Charles,	
P.O. Box 1260 D-84526 Tittmoning Germany		LA 70607	
		Phone: (337) 598-5250	
		Fax: (337) 598-5290	
		Web: www.rosenbergeronline.us	
		Page: 3/3	