


Technical Data Sheet

Rosenberger
Rosenberger Site Solutions, LLC

Multi-
Power

EMI shielded
2-way cable plug reverse

99RS73B-199N1

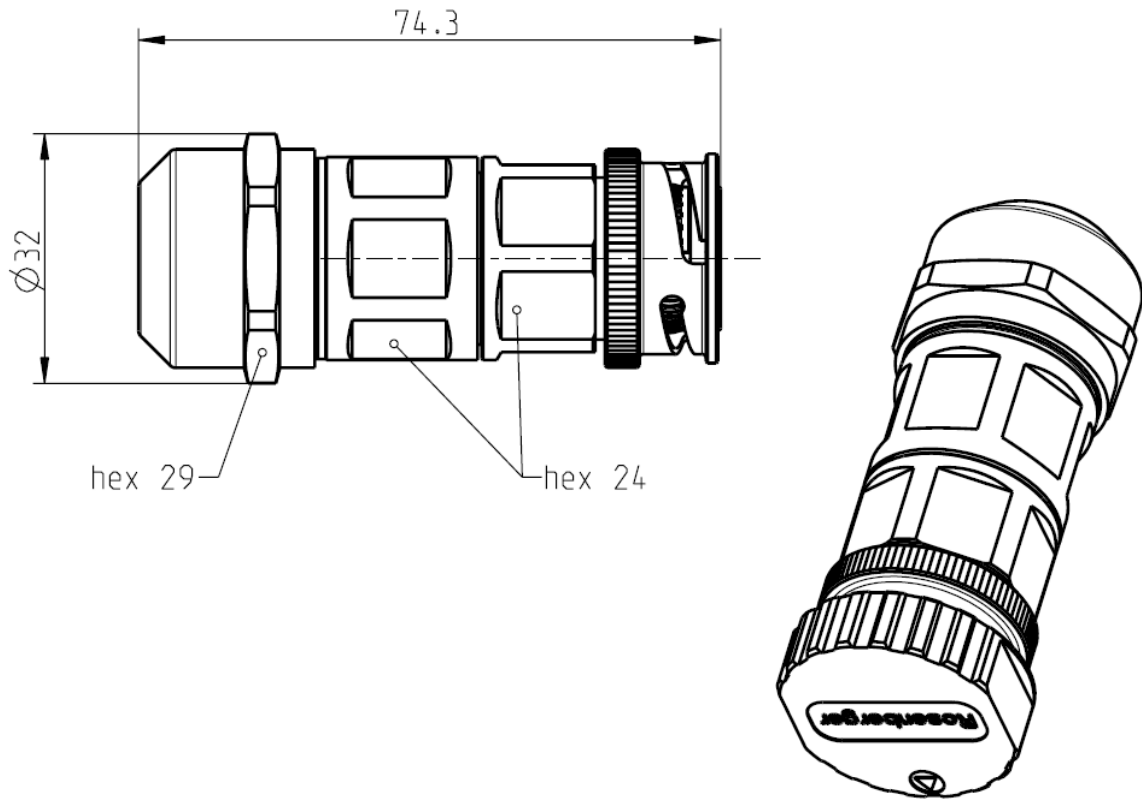

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to

MIL-DTL-26482H Series 2

Documents

Assembly instruction

MA_99A5

Material and plating

Connector parts

Outer contact
Body
Dielectric
Gasket
Insert
Cable clamp
Protection cap

Material

Brass
Brass
POM
Silicone
Spring bronze
PA
POM or equiv.

Plating

Flash white bronze over silver(e.g. Optargen®)
White bronze(e.g. Optalloy®)

Silver, 3-6 µm

Technical Data Sheet

Multi-
Power

EMI shielded
2-way cable plug reverse

99RS73B-199N1

Electrical data

Contact resistance	$\leq 4 \text{ m}\Omega$ @ insert $\leq 1 \text{ m}\Omega$ DC @ outer contact
Working voltage / amperage	39.5V DC / 20A 58.5V DC / 14A
Screening attenuation	min. $\geq 30\text{dB}$ DC to 100 MHz

Mechanical data

Mating cycles	≥ 100
Mating force	$\leq 50\text{N}$
Un-mating force	15N to 50N
Coupling torque	1 Nm to 1.5 Nm
Interface retention force	$\geq 200\text{N}$
Copper wire gauge	1 - 10 mm ²

Environmental data

Temperature range	-40°C to +85°C
Thermal shock	IEC 60169-1, Sub-Clause 16.4 (-40°C / 85°C)
Corrosion resistance	ISO 21207 Method B 5
Vibration	IEC 60068-2-6
Shock	IEC 60068-2-27
Moisture resistance	IEC 60068-2-3
Degree of protection (mated pair)	IEC 60529, IP68
RoHS	compliant

Cable

Cable outer diameter	$\varnothing 7 - 17\text{mm}$
----------------------	-------------------------------

Weight

Weight	148 g/pce
--------	-----------

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
E. Truc-Vallet	17.11.14	E. Truc-Vallet	22.01.15	100	14-m631	T. Stadler	17.11.14

Corporate Headquarters
Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O. Box 1260 D-84526 Tittmoning Germany
Tel. +49 8684 18-0

Rosenberger Site Solutions, LLC
P.O. Box 4268, Lake Charles, LA 70606
Ph.337.598.5250 Fax: 337.598.5290 rlss@rlss.us
www.rlss.us

Page
2 of 2