

LOW PIM CABLE SUPPORT BRACKET MULTI-CONFIGURABLE
D-SSAN2620



Dimensions

Height	56.26 mm 2.2150 in
Length	688.77 mm 27.117 in
Width	304.80 mm 12.0 in
Weight	4.96 kg 10.94 lb

General Specifications

Cable Runs, quantity	Up to 32
Hole Quantity & Size	68 x 0.75" and 68x 0.465"
Material Type	Steel
Finish	Hot Dip Galvanized

Mounting

Mounting Type	Round Member
Mounting Range	60.32 mm to 101.6 mm 2-3/8 in to 4 in OD
Torque	25 ft-lbs

Packaging


Package Quantity	1 Kit
------------------	-------

NOTE
Installation of this product should only be performed by trained, qualified and experienced personnel. Installation instructions for this product should be read thoroughly before installation is performed. The manufacturer and supplier of this product disclaims any liability or responsibility for the results of improper or unsafe installation practice.

When installed properly, this product meets the requirements for installation in High Risk PIM Zones. Static and dynamic testing was conducted per IEC 46/666 "Passive RF and Microwave Devices, Intermodulation Level Measurement", "Part 8: Measurement of passive intermodulation generated by objects exposed to RF radiation" and IEC 62037-1.



Material List

- 1) CABLE SUPPORT BRACKET - HANGER ARM- QTY 2
- 2) CABLE SUPPORT BRACKET - FRONT CLAMP- QTY 1
- 3) CABLE SUPPORT BRACKET - BACK CLAMP- QTY 1
- 4) 3/8"-16 X 10" GALVANIZED THREADED ROD- QTY 2
- 5) 3/8"-16 X 1-1/2 GALVANIZED HEX HEAD BOLT- QTY 2
- 6) 3/8" USS FLAT WASHER GALVANIZED- QTY 8
- 7) 3/8" LOCKWASHER GALVANIZED- QTY 6
- 8) 3/8"-16 "NC" FINISHED HEX NUT GALVANIZED- QTY 8
- 9) 3/8" THREADED ROD INSULATOR- QTY 6

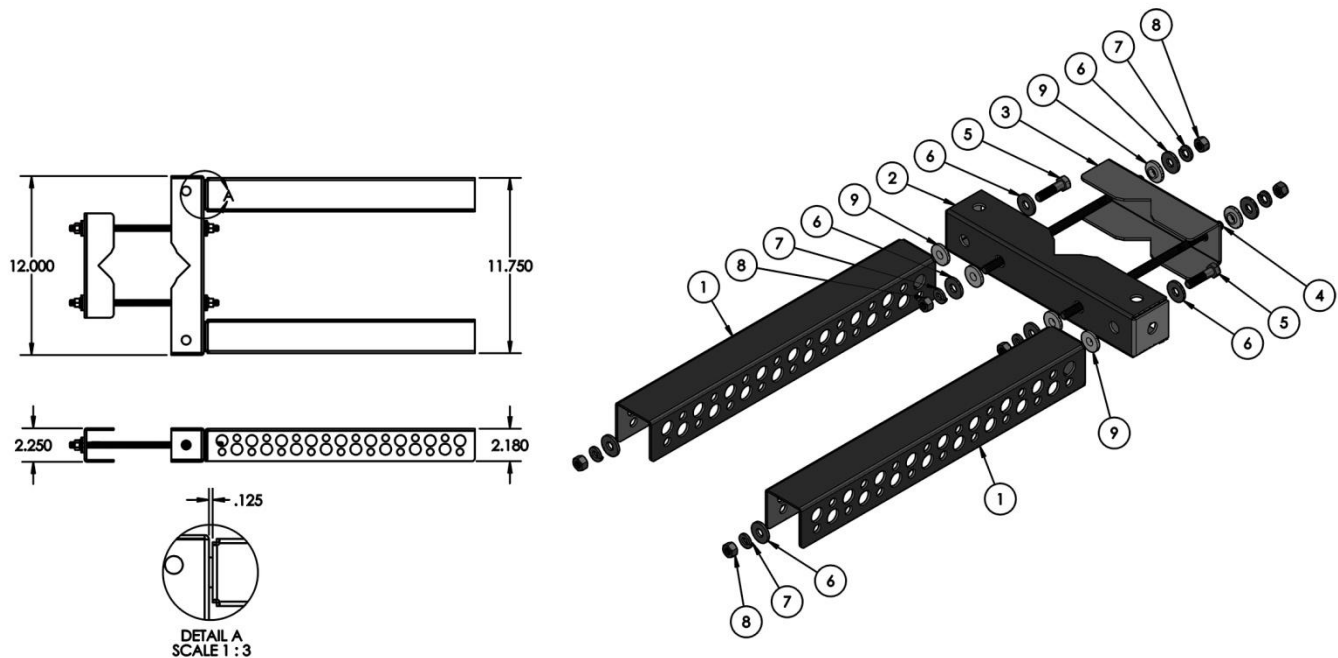

D-SSAN2620

LOW PIM CABLE SUPPORT BRACKET MULTI-CONFIGURABLE.

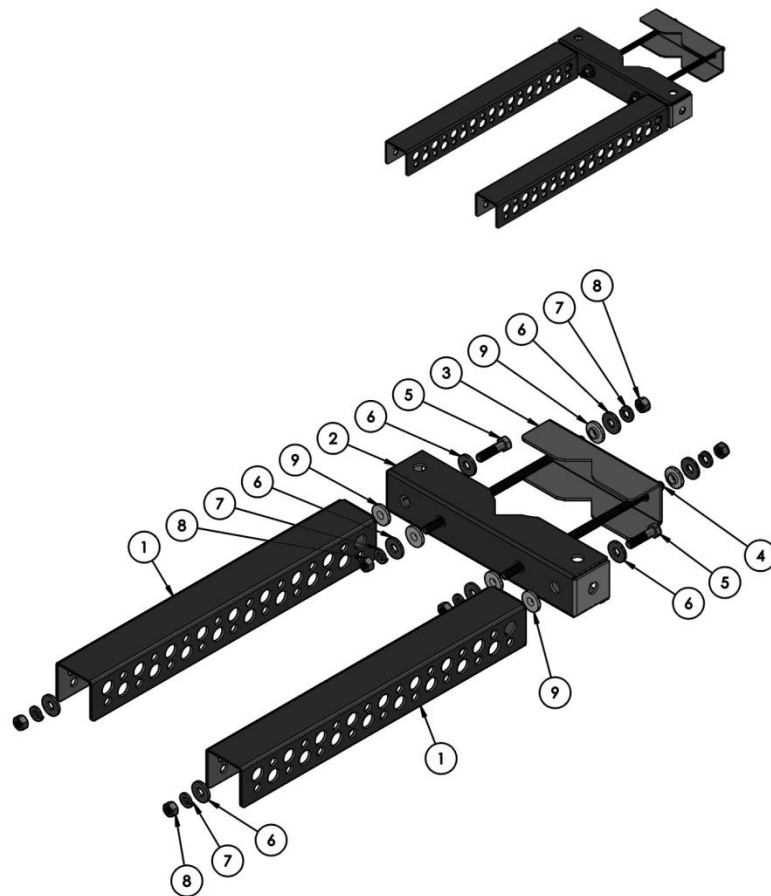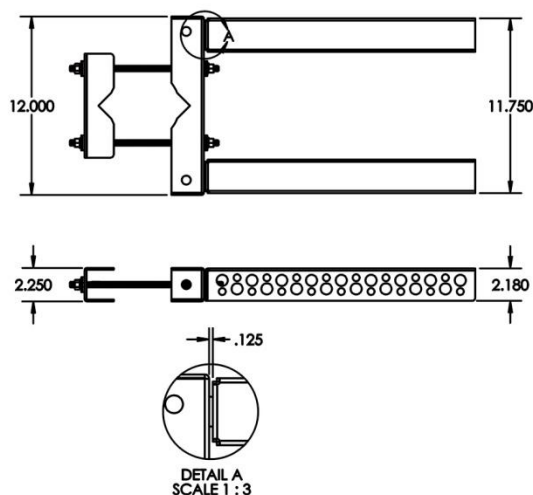

- 1) CABLE SUPPORT BRACKET - HANGER ARM- **QTY 2**
- 2) CABLE SUPPORT BRACKET - FRONT CLAMP- **QTY 1**
- 3) CABLE SUPPORT BRACKET - BACK CLAMP- **QTY 1**
- 4) 3/8-16 X 10" GALVANIZED THREADED ROD- **QTY 2**
- 5) 3/8-16 X 1-1/2 GALVANIZED HEX HEAD BOLT- **QTY 2**
- 6) 3/8 USS FLAT WASHER GALVANIZED- **QTY 8**
- 7) 3/8 LOCKWASHER GALVANIZED- **QTY 6**
- 8) 3/8-16 "NC" FINISHED HEX NUT GALVANIZED- **QTY 8**
- 9) 3/8 THREADED ROD INSULATOR- **QTY 8**

When installed properly, this product meets the requirements for installation in High Risk PIM Zones. Static and dynamic testing was conducted per IEC 46/666 "Passive RF and Microwave Devices, Intermodulation Level Measurement", "Part 8: Measurement of passive intermodulation generated by objects exposed to RF radiation" and IEC 62037-1.

Corporate Headquarters

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O. Box 1260 D-84526 Tittmoning Germany

Rosenberger Site Solutions, LLC

102 Dupont Dr.
Lake Charles, LA 70607

Phone: (337)598-5250

Fax: (337) 598-5290

Web: www.Rosenberger Online.us

Version 051619

Page 1 of 1