

PLASTIC SNAP IN HANGER ADAPTER BRACKET
TH530-SA1C

PLASTIC SNAP IN HANGER ADAPTER BRACKET WITH 3/4" HOLE FOR NEAR FIELD PIM MITIGATION.



General Specifications

Dimensions (LxWxH)	34.24mm (1.35") x 30.00mm (1.18") x 29.30mm (1.15")
Hole Shape & Size	3/4" Hole for Snap-in Hangers
Slot Size	Two slots for Mounting Hardware up-to 1/2"
Maximum Stack Size	Triple stack for hangers TH445-SH47, TH446-SH710, TH447-SH1014, TH448-SH1416
Mounting	3/4 in through hole
Color	Black
Material Type	Engineered Plastic
Standards	ASTM-1200 and ASE I2000 Unaffected by ozone, sunlight, aging, or hot and cold extremities

Environmental Specifications

Environmental Strength Capability	Double cable weight
UV Resistance, minimum with no degradation	1000 hours exposure in accelerated UV life chamber
Vibration Survival	4 hours at resonant frequency

Packaging

Package Quantity	10 pcs
------------------	--------

When installed properly, this product meets the requirements for installation in High Risk PIM Zones. Static and dynamic testing was conducted per IEC 46/666 “Passive RF and Microwave Devices, Intermodulation Level Measurement”, “Part 8: Measurement of passive intermodulation generated by objects exposed to RF radiation” and IEC 62037-1.

Installation Instructions

PLASTIC SNAP IN HANGER ADAPTER BRACKET TH530-SA1C

PLASTIC SNAP IN HANGER ADAPTER BRACKET WITH 3/4" HOLE FOR NEAR FIELD PIM MITIGATION.




3/4" hole for mounting
Snap-in Hangers



Slots for Carrier Approved
Mounting Hardware Up To
1/2" Wide

Typical Installation (for PIM Mitigation)

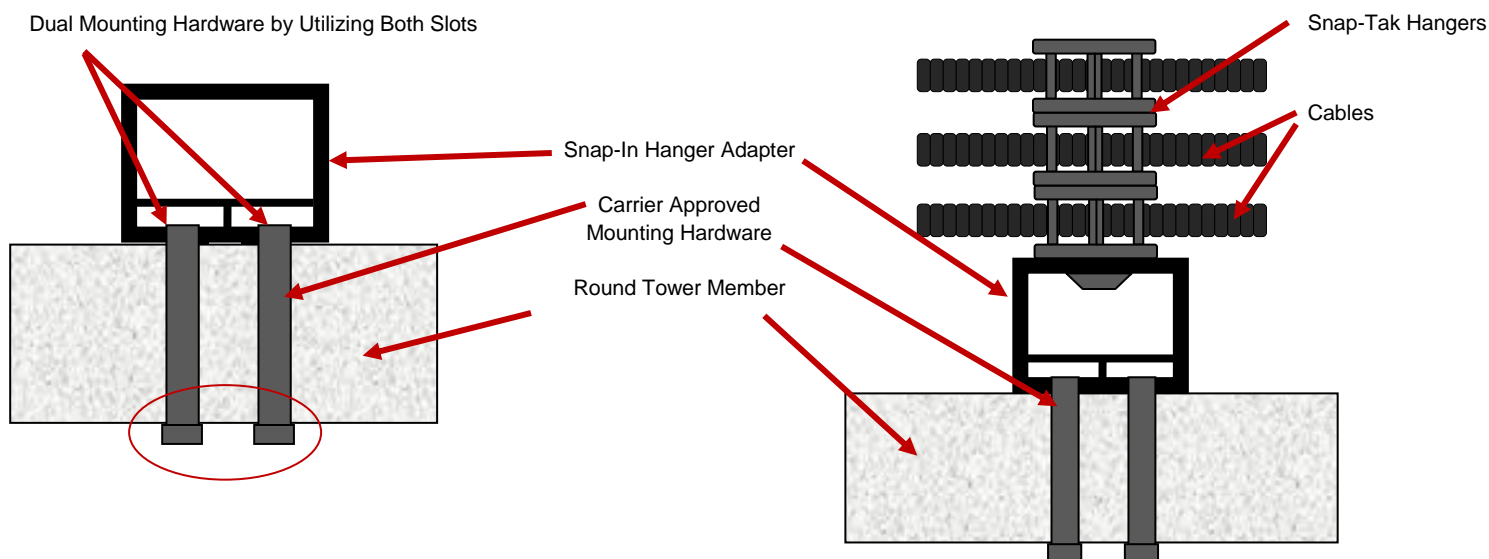

Configuration showing snap-in hanger adapter securely attached
to tower member to support up to 3 Snap-Tak Hangers.

WARNING:

- **Maximum 3 snap-in hanger adapters around round tower members with dual mounting hardware.**
- **Maximum 3 Snap-Tak hangers per snap-in Adapter**

ADDITIONAL MATERIALS / MOUNTING HARDWARE FOR SECURING ON TOWER MEMBER	
PART NUMBER	DESCRIPTION
TX-CSS-50R	DELTEC ACETAL PLASTIC CABLE STRAP (50 FT REEL)
TX-CSS-LH	DELTEC LOCKING HEADS FOR TX-CSS-50R (25 PER PACK)
TX-WT3D	DELTEC SELF LOCKING TY-RAP INSTALLATION AND CUTTING TOOL
THCO-PWD-13-100	0.5"-3.9" PLASTIC ROUND MEMBER ADAPTERS-CLAMP

When installed properly, this product meets the requirements for installation in High Risk PIM Zones. Static and dynamic testing was conducted per IEC 46/666 "Passive RF and Microwave Devices, Intermodulation Level Measurement", "Part 8: Measurement of passive intermodulation generated by objects exposed to RF radiation" and IEC 62037-1.

Corporate Headquarters

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O. Box 1260 D-84526 Tittmoning Germany

Rosenberger Site Solutions, LLC

102 Dupont Dr.
Lake Charles, LA 70607

Phone: (337)598-5250

Fax: (337) 598-5290

Web: www.RosenbergerOnline.us

Version 091318

Page 1 of 1