


**7/16 DIN Straight Jack
(7/8" Normal & Low Loss)**

60K1C7-CX5N1

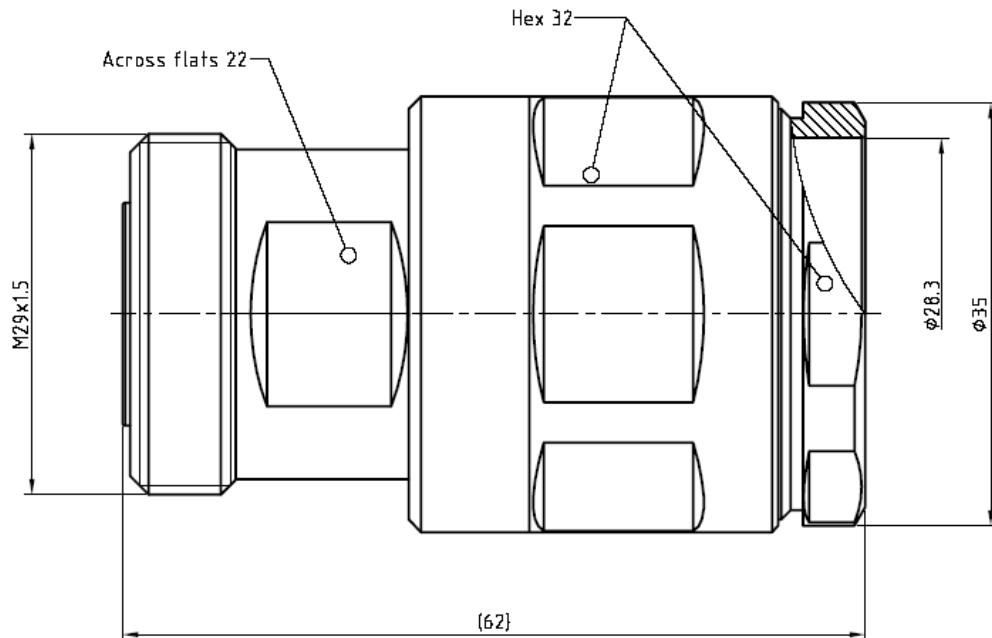

All dimensions are in mm; tolerances according to ISO 2768 m-H

This product used for mobile network and telecommunication equipment

Interface

According to IEC 60169-4, VG 95250, EN 122190, DIN 47233

Documents

Assembly instruction MA_1C7-CX5

Material and plating

Connector parts

Center contact
Outer contact
Body
Dielectric
Gasket

Material

Spring bronze
Brass
Brass
TPX
Silicone

Plating

Silver, 3-6 µm
Flash white bronze over silver(e.g. Optargen®)
Nickel, 2.5-5 µm

TECHNICAL DATA SHEET

Rosenberger
Rosenberger Site Solutions, LLC

**7/16 DIN Straight Jack
(7/8" Normal & Low Loss)**

60K1C7-CX5N1

Electrical data

Impedance	50 Ω
Frequency	DC-8.3GHz
Return loss	$\geq 37\text{dB}$, DC to 1 GHz
	$\geq 35\text{dB}$, 1 to 2.7 GHz
Insertion loss	$\leq 0.05\text{ dB}$
Insulation resistance	$\geq 10^4\text{ M}\Omega$
Center contact resistance	$\leq 0.4\text{m}\Omega$
Outer contact resistance	$\leq 1.5\text{m}\Omega$
Test voltage	4000 V rms
Working voltage	2700 V rms
Power handling (at 20 °C, sea level, VSWR 1.0)	1800 W @ 1 GHz
	800 W @ 4 GHz
Intermodulation (3 rd order)	$\leq -115\text{dBm}$ @ 2 x 20 W

- Limitations are possible due to the used cable type -

Mechanical data

Mating cycles	min. 500
Center contact captivation: axial	$\geq 200\text{ N}$
radial	$\geq 2\text{ Ncm}$
Coupling test torque	max. 35 Nm
Recommended torque	25 Nm to 30 Nm

Environmental data

Temperature range	-45°C to +85°C
Rapid change of temperature	IEC 60068-2-14 Test Na
Corrosion salt mist	IEC 60068-2-11 Test Ka
Vibration	IEC 60068-2-6 Test Fc
Shock	IEC 60068-2-27 Test Ea
Climatic class	IEC 60068-1 (45/85/56)
Cold	IEC 60068-2-1 Test A
Dry heat	IEC 60068-2-2 Test B
Damp heat (steady state)	IEC 60068-2-3 Test Ca
Degree of protection (mated pair)	IEC 60529, IP68
2002/95/EC (RoHS)	compliant

Tooling

60W107-CX5

Suitable cables

SL 078R Series (recommend)

Packing

Standard	1 pcs in box
Weight	151 g/pcs

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Checker	Approved	Date	Rev.	Engineering change number	Name	Date
ZhaiQK					e	-----	ZhaiQK	24/02/10
Corporate Headquarters Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O. Box 1260 D-84526 Tittmoning Germany Tel. +49 8684 18-0					Rosenberger Site Solutions, LLC P.O. Box 4268, Lake Charles, LA 70606 Ph.337.598.5250 Fax: 337.598.5290 rlss@rlss.us www.rlss.us			Page 2 of 2