

## Fiber Optic Cable Termination **FTTA Product Series**

**RTF-4575 • RTF-4501**

The deployment of Remote Radio Head (RRH) architecture poses unique challenges to the mobile telecom industry. Raycap's innovative and flexible RRH Cable Management, Distribution and Protection Solutions provide high levels of flexibility, availability and reliability to radio equipment while mitigating the risk of damage due to lightning.

**RTF-4575****RTF-4501**

### **Features**

- Excess fiber management and storage for up to 40 feet of fiber
- Indoor fiber patching solution for up to 12 fiber optic pairs
- Slim 2U design fits 19" and 23" rack configurations
- Cable entry from the back
- Bend radius protection
- Pull out drawer or fixed with removable lid design for easy access

# Fiber Optic Cable Termination FTTA Product Series



RTF-4575 • RTF-4501

Mechanical Specifications	RTF-4575	RTF-4501
Fiber connection method	Duplex LC/ Duplex LC	Duplex LC/ Duplex LC
Fiber access method	Pull out drawer	Fixed with removable lid
Number of fiber optic pairs	12 pair	12 pair
Operating temperature	-40° C to +80° C	-40° C to +80° C
Weight	9.90 lbs (4.49kg)	6.95 lbs (3.15kg)
Enclosure dimension (L x W x H)	16.02" x 19.00" x 3.50" [407.00 x 482.60 x 88.90 mm]	16.19" x 19.00" x 3.50" [411.26 x 482.60 x 88.90 mm]


## Product Diagram

[mm]  
inches

RTF-4575

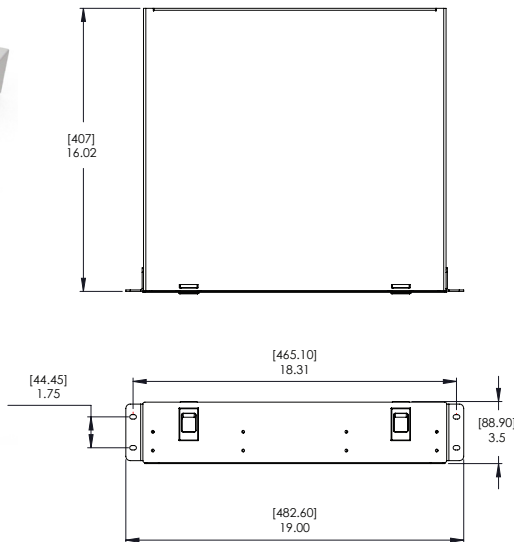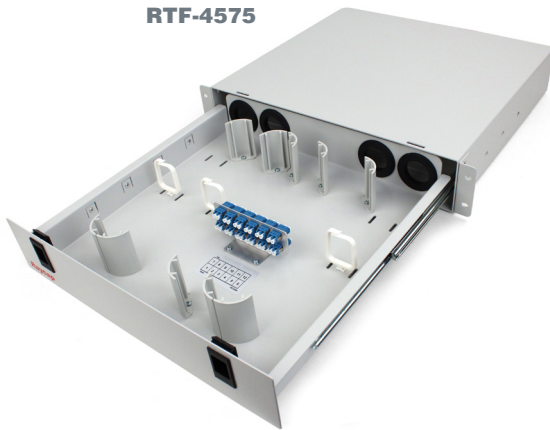

RTF-4501

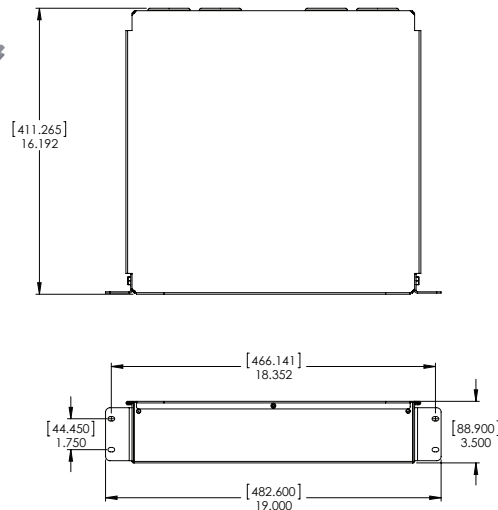

AWG=American Wire Gauge



# Raycap

[www.raycapsurgeprotection.com](http://www.raycapsurgeprotection.com)