


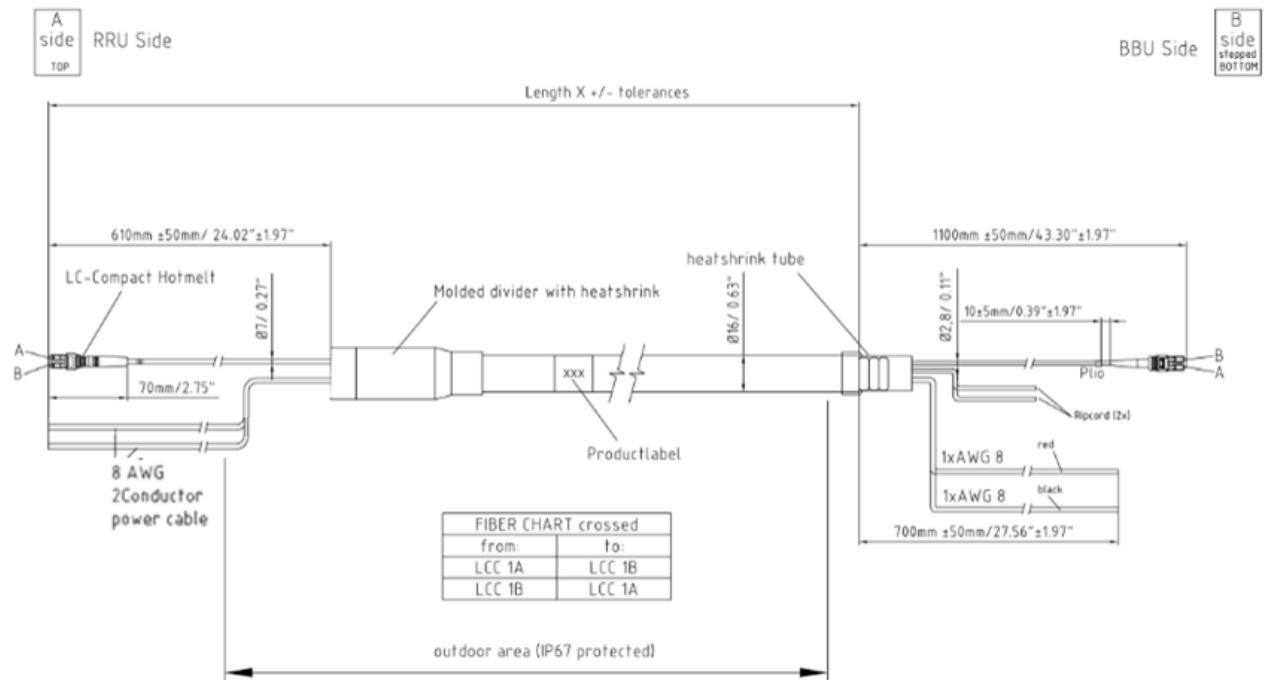

All dimensions are in mm; tolerances according to ISO 2768 m-H

Description

This 2 fiber FTTA hybrid jumper cable assembly connects remote radio heads (RRU) in telecommunication applications. Side A consist of a 7 mm FO fan-out with an overmolded LC Compact connector as well as two 2 conductor 8 AWG shielded power connection fan-out. The B Side of the corrugated hybrid jumper is designed to be connected to a FTTA box solution providing a 2,8 mm LC fan-out and a 2 wire 8 AWG interface for power connection. Two ripcords below the copper tape provide an easy way to cut back the cable jacket on Side B. The assemblies can be used indoor and outdoor, are UV protected and flame retardant.

Available Variants

Type	Length (Ft)	weight (g)/(lb) / pce
HJ-H63032206	6	tbd
HJ-H63032209	9	tbd
HJ-H63032212	12	tbd
HJ-H63032215	15	tbd

Length (m)	Tolerance (mm)
L ≤ 10	+100/- 50
10 < L ≤ 20	+/- 200

Other length on request Please mind derating!

Parts

Connector A	1 x LC Compact Duplex - overmolded, single mode
Connector B	1 x LC Compact Duplex - single mode
Cable	FRNC, UL Type 21285 black
Fiber marking	Identification ring on single fan-out
Ripcord	2x diametrically under corrugated copper-tape

FTTA Hybrid Jumper

LCC+2x8AWG+RFE-2F9μG657A2-LCC+2x8AWG

HJ-H630322XX

Optical data

Cable	2 fibers
Fiber	9/125 μm single mode optical fiber according to ITU-T G.657A2
Cable attenuation	≤ 0.40 dB / km λ = 1310 nm
	≤ 0.25 dB / km λ = 1550 nm

Connector A	LC Compact Duplex
Insertion loss	max. 0.30 dB
Return loss	typ. 55 dB (UPC)

Connector B	LC Compact Duplex
Insertion loss	max. 0.30 dB
Return loss	typ. 55 dB (UPC)

Electrical data

Power conductors	2 (black / red)
Conductor resistance	1.68 Ohm/1000ft@20°C
Operating voltage	150 V
Test voltage (rms 50Hz 1min)	1500 V

Derating according to	DIN EN60512-5-2: tbd
-----------------------	----------------------

Mechanical data

Overall cable diameter, jacket	Ø16 +/- 0.3 mm
Divider Side A	~Ø36mm / ~150mm length
Fiber cable diameter	Ø7.0mm (Side A)
	Ø2.8mm (Side B)
Power cable diameter	AWG8 Ø5,4mm (Side A)
	AWG8 Ø5,4mm (Side B)
Shield conductor main cable	copper corrugation ½ Inch

Minimum bending radius

Cable	
Repeated	240 mm
Single	160 mm

FO Fanout (Ø2.8mm)	
Min. Bending Radius (Installation)	45 mm
Min. Bending Radius (In use)	30 mm

Max. tensile strength

Cable	500N
Fanout Side A (Ø7.0mm)	70N
Fanout- Side B (Ø2.8mm)	70N

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG
RF_35/06.10/1.0

Technical Data Sheet				Rosenberger																											
FTTA Hybrid Jumper LCC+2x8AWG+RFE-2F9µG657A2-LCC+2x8AWG				HJ-H630322XX																											
Environmental data <table><tr><td>Temperature range operation</td><td>-40 °C (-40 °F) up to 85 °C (185 °F)</td></tr><tr><td>Temperature range storage</td><td>-40 °C (-40 °F) up to 85 °C (185 °F)</td></tr><tr><td>Temperature range installation</td><td>-25 °C (-13 °F) up to 70 °C (158 °F)</td></tr><tr><td>RoHS</td><td>compliant (Directive 2011/65/EC)</td></tr><tr><td>Low Smoke, Fire retardant, Zero Halogen</td><td>UL –Style 21285 (80°C/150V)</td></tr><tr><td>Flame retardant</td><td>acc. to IEC 60332-3-24 (Cat. C)</td></tr><tr><td>Halogen free</td><td>acc. to IEC 60754-1</td></tr><tr><td>Sunlight resistant</td><td>acc. to UL 2556 Sec. 4.2.8.5</td></tr><tr><td>Smoke-density</td><td>acc. to IEC 61034</td></tr></table> Packing <table><tr><td>Standard:</td><td>1 pcs in plastic bag</td></tr></table>								Temperature range operation	-40 °C (-40 °F) up to 85 °C (185 °F)	Temperature range storage	-40 °C (-40 °F) up to 85 °C (185 °F)	Temperature range installation	-25 °C (-13 °F) up to 70 °C (158 °F)	RoHS	compliant (Directive 2011/65/EC)	Low Smoke, Fire retardant, Zero Halogen	UL –Style 21285 (80°C/150V)	Flame retardant	acc. to IEC 60332-3-24 (Cat. C)	Halogen free	acc. to IEC 60754-1	Sunlight resistant	acc. to UL 2556 Sec. 4.2.8.5	Smoke-density	acc. to IEC 61034	Standard:	1 pcs in plastic bag				
Temperature range operation	-40 °C (-40 °F) up to 85 °C (185 °F)																														
Temperature range storage	-40 °C (-40 °F) up to 85 °C (185 °F)																														
Temperature range installation	-25 °C (-13 °F) up to 70 °C (158 °F)																														
RoHS	compliant (Directive 2011/65/EC)																														
Low Smoke, Fire retardant, Zero Halogen	UL –Style 21285 (80°C/150V)																														
Flame retardant	acc. to IEC 60332-3-24 (Cat. C)																														
Halogen free	acc. to IEC 60754-1																														
Sunlight resistant	acc. to UL 2556 Sec. 4.2.8.5																														
Smoke-density	acc. to IEC 61034																														
Standard:	1 pcs in plastic bag																														
While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary. <table><tr><td>Draft</td><td>Date</td><td>Approved</td><td>Date</td><td>Rev.</td><td>Engineering change number</td><td>Name</td><td>Date</td></tr><tr><td>D. Nothegger</td><td>18.05.18</td><td>S.Gleich</td><td>18.05.18</td><td>100</td><td>18-0004</td><td>S.Gleich</td><td>18.05.18</td></tr></table> <table><tr><td colspan="4">Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de</td><td colspan="2">Tel. : +49 8684 18-0 Email : info@rosenberger.de</td><td colspan="2">Page 3 / 3</td></tr></table>								Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date	D. Nothegger	18.05.18	S.Gleich	18.05.18	100	18-0004	S.Gleich	18.05.18	Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Email : info@rosenberger.de		Page 3 / 3	
Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date																								
D. Nothegger	18.05.18	S.Gleich	18.05.18	100	18-0004	S.Gleich	18.05.18																								
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Email : info@rosenberger.de		Page 3 / 3																									