


## PRODUCT DESCRIPTION

Aluminum Feed-thru Entry Panels enable multiple coax runs to enter buildings and shelters. The entry panel supports coax at the entry point and prevents moisture from entering the building. Feed-thru entry panels feature 4" (101.6mm) or 5" (127mm) openings to accept 4" (101.6mm) or 5" (127mm) boot assemblies. They can be used in both interior and exterior wall mounting applications. Each feed-thru entry panel includes #14 stainless steel screws, finishing washers, plastic anchors, and entry port caps. Feed-thru entry panels are manufactured from .080" (2.0mm) aluminum and are powder coated to ensure long term integrity and provide appealing

## TYPICAL APPLICATIONS

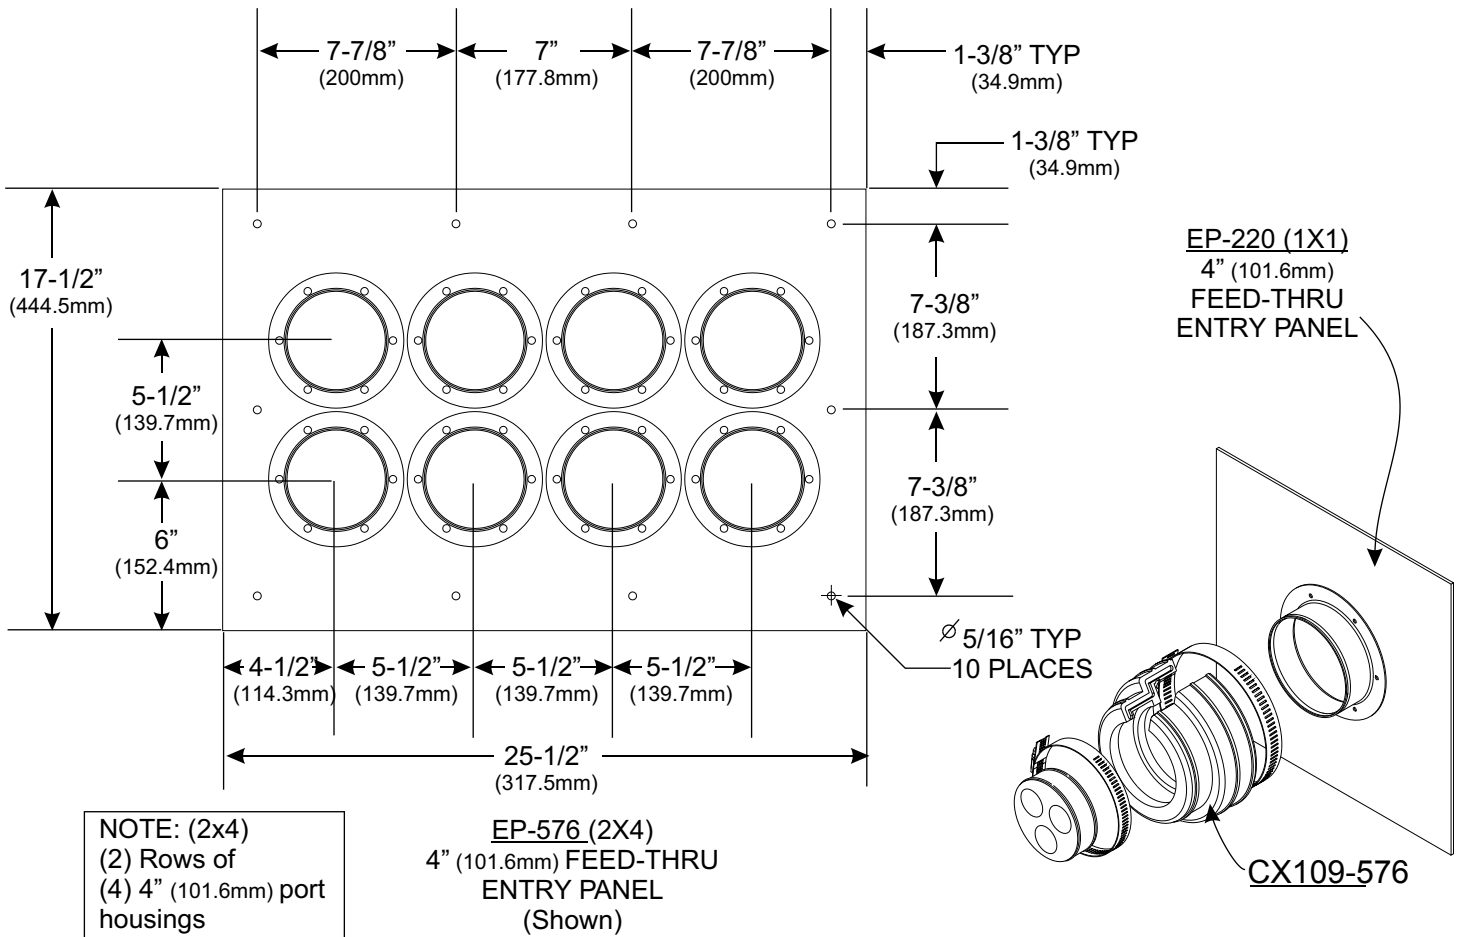

## SPECIFICATIONS

### Finish:

Entry panels are manufactured from .080" aluminum and are powder coated.

All attachment hardware is stainless steel.

### 4" FEED-THRU ENTRY PANEL

Part #	Description	Wall Opening Size Width	Height	Weight lbs. (kg)	Qty.
CX109-576	4" (101.6mm) Entry Panel, 8 Port, 2x4	20-1/2" (520.7mm)	9-1/2" (241.3mm)	6.1 (2.8)	Each