

## **Product Installation**







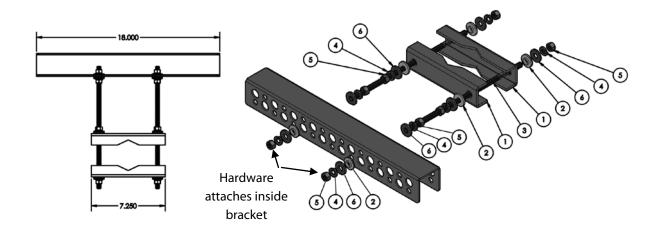

ITEM	Description	QTY
1	SADDLE BRACKET	2
2	3/8" THREADED ROD INSULATOR	6
3	3/8-16 X 12" GALVANIZED THREADED ROD	2
4	3/8 LOCKWASHER GALVANIZED	8
5	3/8-16 "NC" FINISHED HEX NUT GALVANIZED	8
6	3/8 USS FLAT WASHER GALVANIZED	8
7	HANGER BRACKET	1

When installed properly, this product meets the requirements for installation in High Risk PIM Zones. Static and dynamic testing was conducted per IEC 46/666 "Passive RF and Microwave Devices, Intermodulation Level Measurement", "Part 8: Measurement of passive intermodulation generated by objects exposed to RF radiation" and IEC 62037-1.