

RRU CABLE SUPPORT BRACKET KIT
D-RRU-5G-RUN

LOW PIM RRU CABLE SUPPORT BRACKET WITH PLASTIC STANDOFF ADAPTER
ACCOMODATES 29 3/4" HOLES FOR SNAP IN HANGERS AND 29 3/8" HOLES.
SOLD AS KIT OF ONE.



Dimensions

Height	55.37 mm 2.180 in
Length	457.20 mm 18.00 in
Width	241.30 mm 9.5 in
Weight	1.3607 kg 3.0 lb

General Specifications

Hole Size	3/8 in and 3/4"
Hole, quantity	29 of Each
Material Type	Steel
Finish	Hot Dip Galvanized

Mounting

Mounting Type	Round Member
Mounting Range	60.32 mm to 101.6 mm 2-3/8 in to 4 in OD
Torque	25 ft-lbs

Packaging


Package Quantity	1 Kit
------------------	-------

NOTE
Installation of this product should only be performed by trained, qualified and experienced personnel. Installation instructions for this product should be read thoroughly before installation is performed. The manufacturer and supplier of this product disclaims any liability or responsibility for the results of improper or unsafe installation practice.

When installed properly, this product meets the requirements for installation in High Risk PIM Zones. Static and dynamic testing was conducted per IEC 46/666 "Passive RF and Microwave Devices, Intermodulation Level Measurement", "Part 8: Measurement of passive intermodulation generated by objects exposed to RF radiation" and IEC 62037-1.

Material List

- Plastic Standoff Adapter for 3/8" Threaded Rod - **QTY 1**
- 18" Bracket - **QTY 1**
- 3/8" x 9.5" Hot Dipped Galvanized Threaded Rod - **QTY 1**
- 3/8" Hot Dipped Galvanized Nuts - **QTY 4**
- 3/8" Hot Dipped Galvanized Lock Washer - **QTY 3**
- 3/8" Hot Dipped Galvanized Flat Washer - **QTY 3**

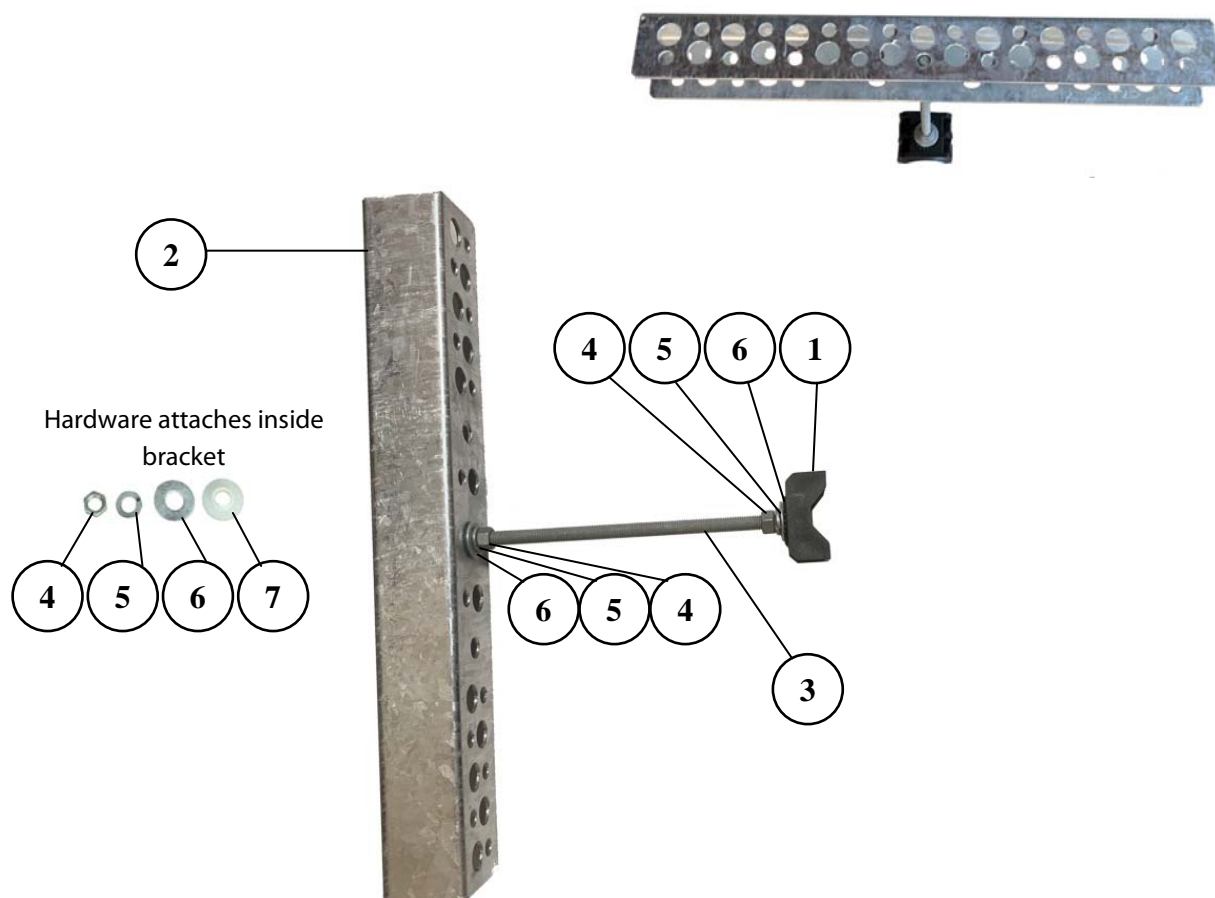

NOTE: For Installations in a high risk PIM zone, approved non-metallic clamps or banding must be used to attach the plastic standoff adapter to the round member.