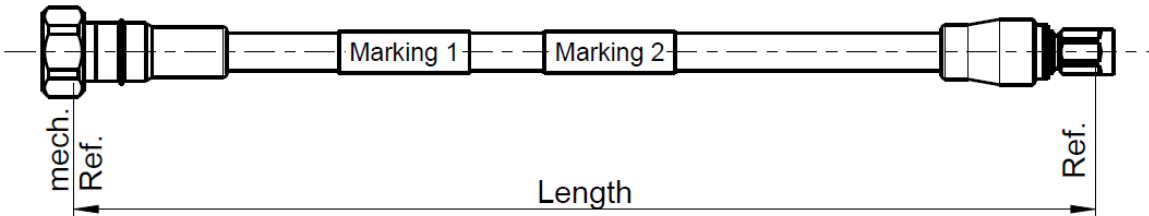


Technical Data Sheet		Rosenberger																			
3/8" JUMPER	4.3-10 MALE NEX10® MALE	SLJ38SP-64M89M-X-00																			
																					
Function Description This part is a coaxial cable assembly for telecommunication equipment. It consists of 3/8" super flexible coaxial cable with PE jacket, one 4.3-10 male and one NEX10® male connector. The assembly is waterproof in mated condition and UV protected. <tr><td colspan="3"> Available Variants The assembly is available in lengths from 0.5 m to 10 m in intervals of 0.5 m. Different feet and inch lengths are available on request. <tr><td colspan="3"> Assembly Parts <table><tr><td>Connectors</td><td>4.3-10 (screw-type) male and NEX10® male (screw-type) connector plated with white bronze</td></tr><tr><td>Cable</td><td>S-Link 3/8"S, PE jacket or Flexline 3/8" S PE</td></tr><tr><td>Marking 1</td><td>Direct print onto the cable or on wrapping label Marking includes manufacturer, part nr. & batch no.</td></tr><tr><td>Marking 2</td><td>Direct print onto the cable or on wrapping label Marking includes "Rosenberger factory made" Position in the middle of the cable</td></tr><tr><td>Bend Protection</td><td>Molding material TPE compound or anti-kink sleeve</td></tr></table><tr><td colspan="2">Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.com</td><td>Tel. : +49 8684 18-0 Email : info@rosenberger.com Page 1 / 2 </td></tr></td></tr></td></tr>			Available Variants The assembly is available in lengths from 0.5 m to 10 m in intervals of 0.5 m. Different feet and inch lengths are available on request. <tr><td colspan="3"> Assembly Parts <table><tr><td>Connectors</td><td>4.3-10 (screw-type) male and NEX10® male (screw-type) connector plated with white bronze</td></tr><tr><td>Cable</td><td>S-Link 3/8"S, PE jacket or Flexline 3/8" S PE</td></tr><tr><td>Marking 1</td><td>Direct print onto the cable or on wrapping label Marking includes manufacturer, part nr. & batch no.</td></tr><tr><td>Marking 2</td><td>Direct print onto the cable or on wrapping label Marking includes "Rosenberger factory made" Position in the middle of the cable</td></tr><tr><td>Bend Protection</td><td>Molding material TPE compound or anti-kink sleeve</td></tr></table><tr><td colspan="2">Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.com</td><td>Tel. : +49 8684 18-0 Email : info@rosenberger.com Page 1 / 2 </td></tr></td></tr>			Assembly Parts <table><tr><td>Connectors</td><td>4.3-10 (screw-type) male and NEX10® male (screw-type) connector plated with white bronze</td></tr><tr><td>Cable</td><td>S-Link 3/8"S, PE jacket or Flexline 3/8" S PE</td></tr><tr><td>Marking 1</td><td>Direct print onto the cable or on wrapping label Marking includes manufacturer, part nr. & batch no.</td></tr><tr><td>Marking 2</td><td>Direct print onto the cable or on wrapping label Marking includes "Rosenberger factory made" Position in the middle of the cable</td></tr><tr><td>Bend Protection</td><td>Molding material TPE compound or anti-kink sleeve</td></tr></table> <tr><td colspan="2">Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.com</td><td>Tel. : +49 8684 18-0 Email : info@rosenberger.com Page 1 / 2 </td></tr>			Connectors	4.3-10 (screw-type) male and NEX10® male (screw-type) connector plated with white bronze	Cable	S-Link 3/8"S, PE jacket or Flexline 3/8" S PE	Marking 1	Direct print onto the cable or on wrapping label Marking includes manufacturer, part nr. & batch no.	Marking 2	Direct print onto the cable or on wrapping label Marking includes "Rosenberger factory made" Position in the middle of the cable	Bend Protection	Molding material TPE compound or anti-kink sleeve	Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.com		Tel. : +49 8684 18-0 Email : info@rosenberger.com Page 1 / 2
Available Variants The assembly is available in lengths from 0.5 m to 10 m in intervals of 0.5 m. Different feet and inch lengths are available on request. <tr><td colspan="3"> Assembly Parts <table><tr><td>Connectors</td><td>4.3-10 (screw-type) male and NEX10® male (screw-type) connector plated with white bronze</td></tr><tr><td>Cable</td><td>S-Link 3/8"S, PE jacket or Flexline 3/8" S PE</td></tr><tr><td>Marking 1</td><td>Direct print onto the cable or on wrapping label Marking includes manufacturer, part nr. & batch no.</td></tr><tr><td>Marking 2</td><td>Direct print onto the cable or on wrapping label Marking includes "Rosenberger factory made" Position in the middle of the cable</td></tr><tr><td>Bend Protection</td><td>Molding material TPE compound or anti-kink sleeve</td></tr></table><tr><td colspan="2">Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.com</td><td>Tel. : +49 8684 18-0 Email : info@rosenberger.com Page 1 / 2 </td></tr></td></tr>			Assembly Parts <table><tr><td>Connectors</td><td>4.3-10 (screw-type) male and NEX10® male (screw-type) connector plated with white bronze</td></tr><tr><td>Cable</td><td>S-Link 3/8"S, PE jacket or Flexline 3/8" S PE</td></tr><tr><td>Marking 1</td><td>Direct print onto the cable or on wrapping label Marking includes manufacturer, part nr. & batch no.</td></tr><tr><td>Marking 2</td><td>Direct print onto the cable or on wrapping label Marking includes "Rosenberger factory made" Position in the middle of the cable</td></tr><tr><td>Bend Protection</td><td>Molding material TPE compound or anti-kink sleeve</td></tr></table> <tr><td colspan="2">Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.com</td><td>Tel. : +49 8684 18-0 Email : info@rosenberger.com Page 1 / 2 </td></tr>			Connectors	4.3-10 (screw-type) male and NEX10® male (screw-type) connector plated with white bronze	Cable	S-Link 3/8"S, PE jacket or Flexline 3/8" S PE	Marking 1	Direct print onto the cable or on wrapping label Marking includes manufacturer, part nr. & batch no.	Marking 2	Direct print onto the cable or on wrapping label Marking includes "Rosenberger factory made" Position in the middle of the cable	Bend Protection	Molding material TPE compound or anti-kink sleeve	Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.com		Tel. : +49 8684 18-0 Email : info@rosenberger.com Page 1 / 2			
Assembly Parts <table><tr><td>Connectors</td><td>4.3-10 (screw-type) male and NEX10® male (screw-type) connector plated with white bronze</td></tr><tr><td>Cable</td><td>S-Link 3/8"S, PE jacket or Flexline 3/8" S PE</td></tr><tr><td>Marking 1</td><td>Direct print onto the cable or on wrapping label Marking includes manufacturer, part nr. & batch no.</td></tr><tr><td>Marking 2</td><td>Direct print onto the cable or on wrapping label Marking includes "Rosenberger factory made" Position in the middle of the cable</td></tr><tr><td>Bend Protection</td><td>Molding material TPE compound or anti-kink sleeve</td></tr></table> <tr><td colspan="2">Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.com</td><td>Tel. : +49 8684 18-0 Email : info@rosenberger.com Page 1 / 2 </td></tr>			Connectors	4.3-10 (screw-type) male and NEX10® male (screw-type) connector plated with white bronze	Cable	S-Link 3/8"S, PE jacket or Flexline 3/8" S PE	Marking 1	Direct print onto the cable or on wrapping label Marking includes manufacturer, part nr. & batch no.	Marking 2	Direct print onto the cable or on wrapping label Marking includes "Rosenberger factory made" Position in the middle of the cable	Bend Protection	Molding material TPE compound or anti-kink sleeve	Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.com		Tel. : +49 8684 18-0 Email : info@rosenberger.com Page 1 / 2						
Connectors	4.3-10 (screw-type) male and NEX10® male (screw-type) connector plated with white bronze																				
Cable	S-Link 3/8"S, PE jacket or Flexline 3/8" S PE																				
Marking 1	Direct print onto the cable or on wrapping label Marking includes manufacturer, part nr. & batch no.																				
Marking 2	Direct print onto the cable or on wrapping label Marking includes "Rosenberger factory made" Position in the middle of the cable																				
Bend Protection	Molding material TPE compound or anti-kink sleeve																				
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.com		Tel. : +49 8684 18-0 Email : info@rosenberger.com Page 1 / 2																			

Technical Data Sheet

Rosenberger3/8"
JUMPER4.3-10 MALE
NEX10® MALE**SLJ38SP-64M89M-X-00****Electrical Data**

Impedance	50 Ω		
Frequency	DC to 6.0 GHz		
Return loss	L ≤ 10 m	L > 10 m	L > 20 m
380 – 470 MHz	≥ 30 dB	≥ 28 dB	≥ 26 dB
600 – 960 MHz	≥ 30 dB	≥ 28 dB	≥ 26 dB
1.4 – 2.7 GHz	≥ 28 dB	≥ 26 dB	≥ 24 dB
3.4 – 3.8 GHz	≥ 25 dB	≥ 23 dB	≥ 21 dB
5.1 – 6.0GHz	≥ 23 dB	≥ 21 dB	≥ 19 dB
Insertion loss typ.			
DC – 1 GHz	≤ 0.14 dB/m (cable) + 0.01 dB * √f (GHz)		
1 – 2.2 GHz	≤ 0.21 dB/m (cable) + 0.01 dB * √f (GHz)		
2.2 – 2.7 GHz	≤ 0.24 dB/m (cable) + 0.01 dB * √f (GHz)		
2.7 – 3.8 GHz	≤ 0.31 dB/m (cable) + 0.01 dB * √f (GHz)		
5.1 – 6.0 GHz	≤ 0.39 dB/m (cable) + 0.01 dB * √f (GHz)		
Intermodulation (3rd order @ 2 x 20 W)	typ.	max.	
	≤ -120 dBm	≤ -117 dBm	
DC breakdown voltage	2500 V		

Mechanical Data

Coupling torque NEX10® (recommended)	1.5 – 5 Nm
Coupling torque 4.3-10 (recommended)	5 to 8 Nm
Spanner flat on NEX10® coupling nut	11 mm
Spanner flat on 4.3-10 coupling nut	22 mm
Cable diameter, jacket	10.2 mm typ.
Tensile strength	500 N
Recommended hanger spacing	0.6 m
Minimum bend radius single	13 mm*
Minimum bend radius repeated	25 mm*
*Bending starts behind connector incl. kink protection	

Environmental Data

Operation temperature range	-40 °C to +80 °C
Installation temperature range	-25 °C to +60 °C
Degree of protection	IEC 60529, IP68 1 bar for 1 h (mated)
RoHS	compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

For the installation of the electrotechnical equipment, particular electrotechnical expertise is required.



Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
F. Fraunhofer	06.12.2018	F. Fraunhofer	26.10.23	a02	23-0004	F. Fraunhofer	26.10.23
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.com				Tel. : +49 8684 18-0 Email : info@rosenberger.com			Page 2 / 2