


RPC-N
50 Ω LOAD JACK

Ordering # AL-05-K150-010S3

Part # **05K150-010S3**

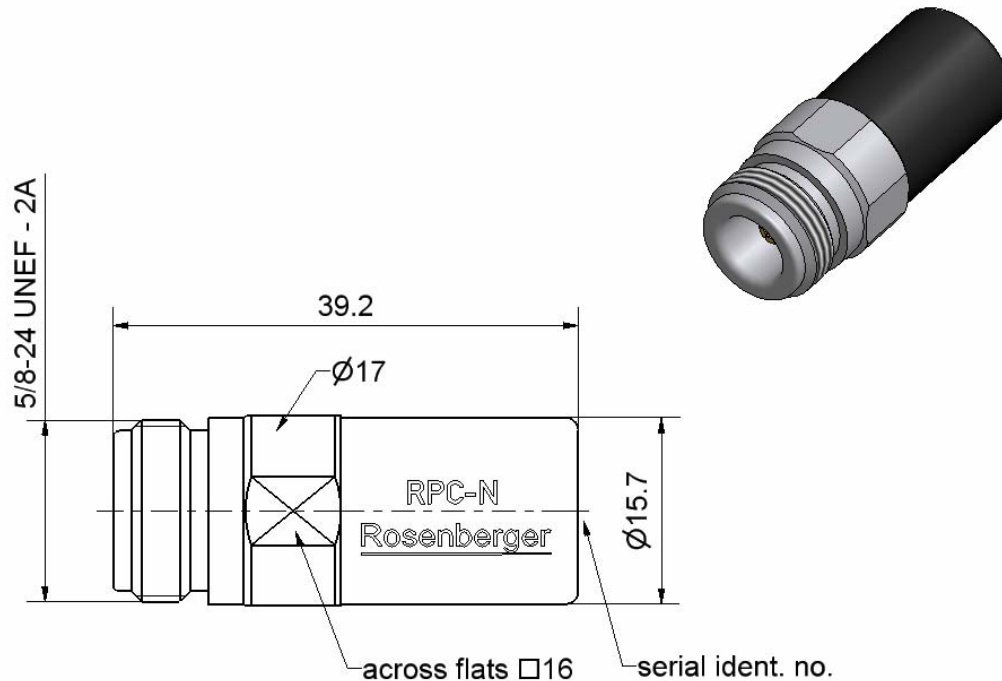

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to IEC 60169-16 ; CECC 22 210 ; MIL-STD 348A/402

Documents

N/A

Material and plating

Connector parts

Center contact
Outer contact
Dielectric
Substrate

Material

Beryllium copper
Stainless steel
PPE
Al₂O₃

Plating

Gold, min. 1.27 µm, over nickel
Passivated

TECHNICAL DATA SHEET

RPC-N
50 Ω LOAD JACK

Ordering # AL-05-K150-010S3

Part # **05K150-C10S3**

Electrical data

Impedance	50 $\Omega \pm 0.25 \Omega$
Frequency	DC to 18 GHz
Return loss	$\geq 45 \text{ dB}$, DC to 4 GHz $\geq 30 \text{ dB}$, 4 GHz to 18 GHz
Center contact resistance	$\leq 1.0 \text{ m}\Omega$
Outer contact resistance	$\leq 1.0 \text{ m}\Omega$
Power handling	0.5 W

Mechanical data

Mating cycles	≥ 500
Center contact captivation	$\geq 28 \text{ N}$
Coupling test torque	1.70 Nm
Recommended torque	0.68 Nm to 1.13 Nm

Environmental data

Temperature range	0°C to +50°C
2002/95/EC (RoHS)	compliant

Tooling

N/A

Suitable cables

N/A

Packing

Standard	1 pce in bag
Weight	44.9 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Kerstin Herzog	14/02/05	Andreas Burkert	15/12/06	b00	06-0473	Kerstin Herzog	15/12/06
Corporate Headquarters Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O. Box 1260 D-84526 Tittmoning Germany Tel. +49 8684 18-0				Rosenberger Site Solutions, LLC P.O. Box 8817 Lake Charles, LA 70606 Ph: 337.598.5250 Fax: 337.598.5290 rlss@rlss.us www.rlss.us			Page 2 / 2