


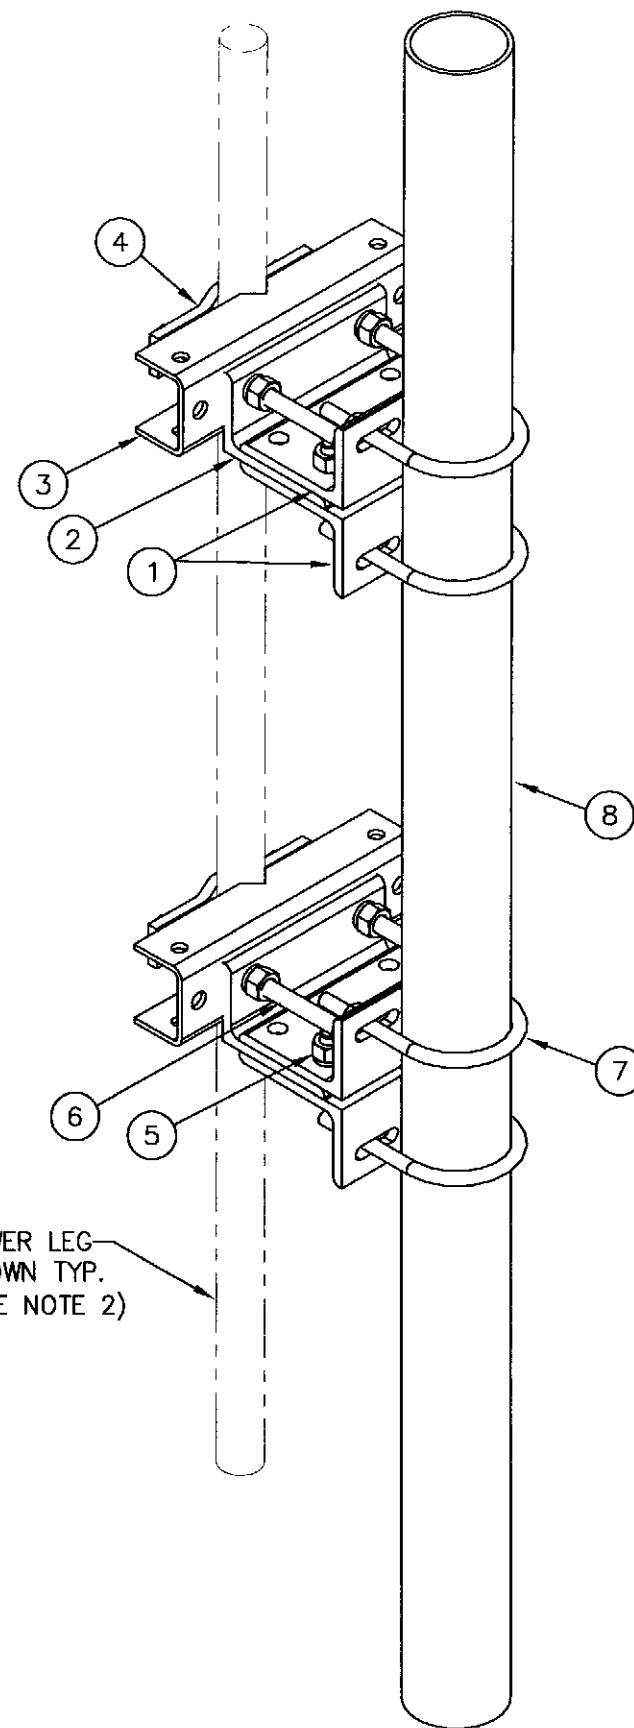

ISOMETRIC VIEW

C10172998 ANTENNA PIPE MOUNTING KIT

ITEM	QTY.	PART NO.	DESCRIPTION	WEIGHT
1.	4	CS01427	ANGLE, PIPE MOUNT	50#
2.	2	CS01428	ANGLE, PIPE MOUNT	25#
3.	2	CS01360	PLATE, MOUNTING BRACKET (FORMED CHANNEL)	18#
4.	2	CS01361	PLATE, 2 HOLE ADAPTER CLAMP	5#
5.	4	C40026047	BOLT ASSEMBLY, 3/4 Ø X 3 A325	3#
6.	4	C40140001	BOLT ASSEMBLY, 3/4 X 10 A307 W/NUT, LKW, FLW	7#
7.	4	C40034032	U-BOLT ASSEMBLY, 5/8 X 5 3/16 C-C	9#
8.	1	C10981407	PIPE, 4 1/2" O.D. (.180" WALL) X 7'-0"	58#
TOTAL WEIGHT				175#

NOTES:

- QUANTITIES SHOWN IN THE LIST OF MATERIAL ARE FOR ONE ANTENNA PIPE MOUNTING KIT ONLY.
- THIS ANTENNA PIPE MOUNTING KIT WILL MOUNT TO THE FOLLOWING TOWER LEG SIZES:
 - 1 1/2" Ø TO 5 9/16" Ø ROUND LEG
 - L 2 1/2 X 2 1/2 TO L 4 X 4 ANGLE LEG

Distributed By

Rosenberger
Rosenberger Site Solutions, LLC

Call 1.866.598.5250 or visit www.RLSS.us

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS INCLUDE FINISHES AND ARE IN INCHES				MATERIAL:				ANTENNA PIPE MOUNTING KIT (1 1/2"Ø TO 5 9/16"Ø ROUND LEG) (2 1/2" X 2 1/2" TO 4" X 4" ANGLE LEG)						
TOLERANCES: FRACTIONS ± 1/16" ANGLES ± 1/2 DEG. DECIMALS ± .010"				TOLERANCES DO NOT APPLY TO RAW MATERIAL										
						CONFIDENTIAL Information contained herein is the sole property of Sabre Communications Corporation, constitutes a trade secret as defined by Iowa Code Ch. 550 and shall not be reproduced, copied or used in whole or in part for any purpose whatsoever without prior written consent of Sabre Communications Corporation.				SIZE	DRAWING NO.		REV	
								DATE	9/12/07	B	C10172998		1	
								DRAWN BY	MLC			SCALE	PAGE	
								CHECKED BY	MC			None	1 OF 1	
1	1/13/09	MLC	MC	REVISED PIPE (ITEM 8)										
REV	DATE	DRW	CHK	DESCRIPTION										