
Date/Time: 7/19/2017 8:44:06 AM



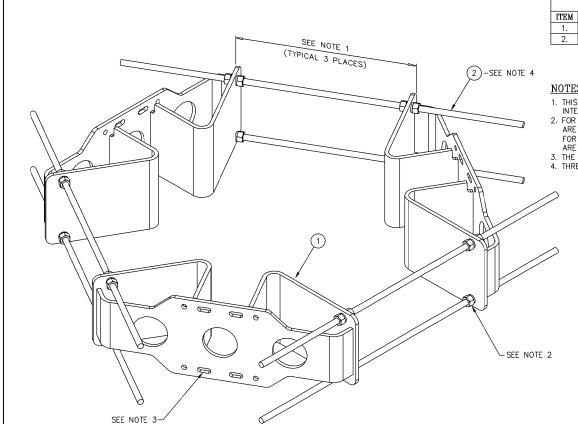

C10112378 TRI-COLLAR ASSEMBLY (12"-60" MONOPOLE)							
	ITEM QTY. PART. NO.			DESCRIPTION	WEIGHT		
	1.	3	CW01334	WELDMENT, TRI-COLLAR (12"-60" MONOPOLE)		330	
	2.	6	C40094010	THREADED ROD ASSEMBLY 3/4 X 4'	-4"	36	
					TOTAL WEIGHT	366	

NOTES:

- 1. THIS DISTANCE MUST BE EQUAL IN ALL (3) THREE LOCATIONS TO ENSURE THE STRUCTURAL INTEGRITY OF THE THREADED RODS AS WELL AS 120° SEPARATION.
- 2. FOR MONOPOLES 13" DIA. OR SMALLER, ONLY (1) ONE NUT AND (1) ONE LOCKWASHER
 ARE REQUIRED BETWEEN THE TRI-COLLAR BRACKETS.
 FOR MONOPOLES LARGER THAN 13" DIA., (2) TWO NUTS AND (2) TWO LOCKWASHERS
 ARE REQUIRED BETWEEN THE TRI-COLLAR BRACKETS.

 3. THE MOUNTING SLOTS NOTED WILL ACCOMMODATE 2 3/8"-4 1/2" O.D. MOUNTING PIPES.

 4. THREADED ROD MAY BE SHORTENED IF REQUIRED, FIELD CUT AND COLD GALV SPRAY TO SUIT.

Distributed By Rosenberger Rosenberger Site Solutions, LLC

visit www.RosenbergerOnline.us

ISOMETRIC VIEW		ISION D AF RACT	IS IN RE IN TIONS	CLUDE INCHES	MATERIAL: TOLERANCES DO NOT APPLY TO RAW MATERIAL	Sabre Industries" Towers and Poles	
	F	\vdash	=			CONFIDENTIAL	
	\vdash	-	-			This document and the information	

DESCRIPTION

	This document and the information	
	contained herein is the confidential trade	
	secret property of Sabre Communications	
	Corporation ("Sabre") and must not be	
	reproduced, copied or used, in whole or in part, for any purpose without the prior	DATE
	written consent of Sabre. © 2014 Sabre Communications Corporation.	DRAW
1	U 2014 Sabre Communications Corporation.	

All rights reserved.

TRI-COLLAR BRACKET ASSEMBLY FOR MONOPOLES (12"-60" DIA.) (CIRCUMFERENCE 37.7" TO 188.5")

		SIZE	DRAWING NO.		REV	
ATE 12/08/		В	C10112378		0	
RAWN BY WRF		' I		SCALE	PAGE	
HECKED BY	KE			None	1 OF 1	