

Universal Grounding Kit CX35-UGK

Universal Grounding Kit - Two Hole (3/8" & 1/4") Crimp on Lug, 60" Lead.




Features

The Universal Grounding Kit installs like a traditional kit, but can be used to fit any cable size from 1/2" to 3', ensuring that you have the right kit in the field when you need it. It features an elongated flat ground strap which the installer must simply cut in a pre-marked spot, depending on the cable size. Also included is a complete weatherproofing package with butyl and electrical tape.

Material

- Universal Ground Strap: Copper
- Ground Lugs: Tinned Copper
- Lead: 6 Gauge, 7-strand Insulated Copper Wire
- Lug Attachment - Stainless Steel

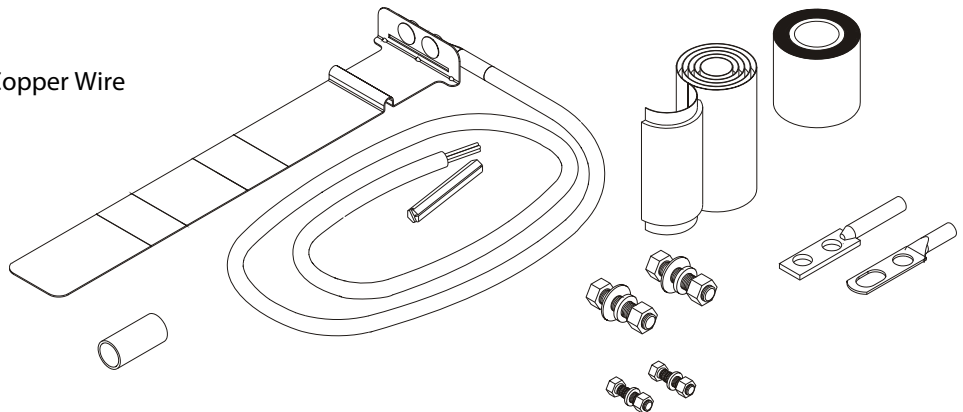

Applications

The Universal Ground Kit is specifically designed to accommodate a broad range of transmission line sizes, thus reducing inventory costs as well as eliminating errors due to incorrectly defined line sizes. The Universal Ground Kit is designed to comply with MIL-STD-188-124A and to withstand an excess of 2000kA. The copper strap and associated hardware facilitates a proper attachment to the coaxial cable. The 6-gauge, 7 strand copper wire provides the most practical and effective low-inductance transfer of lightning induced current from your coax to your system ground. Installation of ground kits is recommended at the top and bottom of each vertical run, at 200 ft. increments and just prior to building entry.

NOTE

Installation of this product should only be performed by trained, qualified and experienced personnel. Installation instructions for this product should be read thoroughly before installation is performed. The manufacturer and supplier of this product disclaim any liability or responsibility for the results of improper or unsafe installation practice.

Corporate Headquarters

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O. Box 1260 D-84526 Tittmoning Germany

Rosenberger Site Solutions, LLC

102 Dupont Dr.
Lake Charles, LA 70607

Phone: (337)598-5250

Fax: (337) 598-5290

Web: www.rlss.us e-mail: rlss@rlss.us

Version 120113

Page 1 of 1